

Date tehnice pentru produs: HSELDA40WP

Cutie FTTH aparentă, goală pentru 4 FO, L=80xH=28xA=80mm

RAL9010 alb pur, potrivită și pentru montaj pe șină DIN



Schrack-Info

FTTH empty outlets serve as a universal interface for fiber optic installations.

They offer a high degree of flexibility when it comes to equipping and adapting the network infrastructure.

Empty outlets are an ideal solution for organizing the fiber-optic connection efficiently and ensuring a clean, well-structured installation—especially when planning for future expansions or upgrades of the network structure.

Features

- Fiber Optic In-House-Cabling
- Offers connection options for up to 4 end devices
- The box is suitable for pre-assembled cables or for pigtails

- Flexible cable entry options
- Lid locks into place
- 2 screws, 2 dowels, and 2 shrink splice protectors included

Optional Accessories

Couplers:

- HSELSK09MR
- HSELSK09GR

Pigtails:

- HLP09M041P
- HLP09D041P

Safety information:

Avoid direct contact with light sources:

- Fiber optic cables—especially those with active light sources such as lasers (e.g., in optical communication systems)—can emit hazardous radiation that may damage the eyes.
- Never look directly into the light of a fiber optic cable, even if the light source is invisible to the naked eye.

Wear protective eyewear:

- When working with fiber optic cables, especially during tests or when using lasers, always wear safety glasses to protect your eyes from harmful radiation.

Handle cables correctly:

- Plug in and unplug cables only by holding the connector, and never pull directly on the cable.

Do not bend or crush:

- Fiber optic cables are sensitive to mechanical stress.

Protect from damage:

- Install cables in dedicated conduits or use protective materials to prevent physical damage.

Keep connectors clean:

- Fiber optic connectors must be free of dust and dirt.
- Even small particles on the connectors can significantly reduce signal quality.

Observe temperature limits:

- Do not expose cables to extremely high or low temperatures.
- Follow the manufacturer's specifications for the cable's maximum operating temperature.


Inspect regularly:

- Frequently check cables for visible damage such as cracks, bends, or signs of wear.
- Damaged cables must be replaced immediately.

Fișe tehnice

Lățime netă (mm)	80,00
Înălțime (mm)	28,00
Masă netă (kg.)	0,05
Culoare	RAL 9010 (Alb pur)
Temperatura minimă a mediului ambiant (°C)	-40
Temperatura maximă a mediului ambiant (°C)	75

Desen dimensional: Cutie FTTH aparentă, goală pentru 4 FO, L=80xH=28xA=80mm

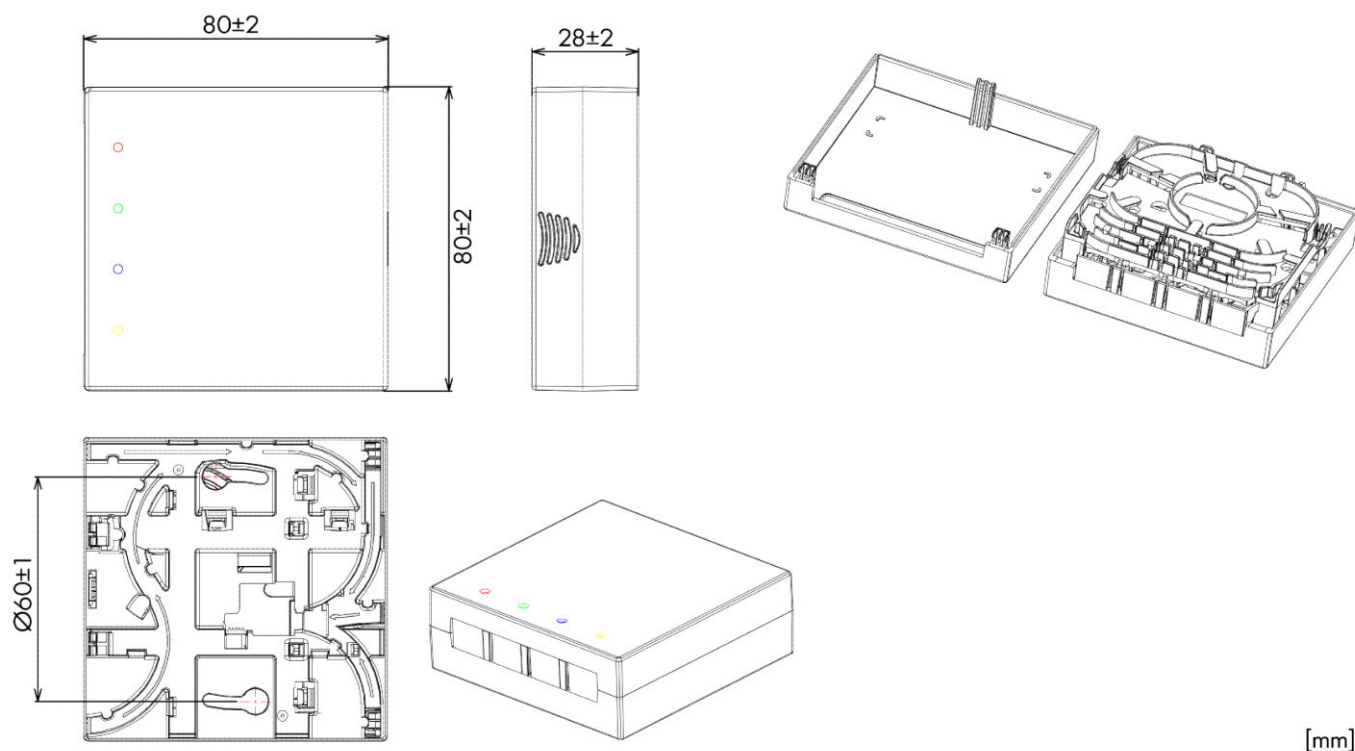

Tabel articole

Descriere	Cod comandă
Cutie FTTH aparentă, goală pentru 4 FO, L=80xH=28xA=80mm RAL9010 alb pur, potrivită și pentru montaj pe șină DIN	HSELDA40WP
Accesorii opționale	
Cuplor FO FTTH LC/APC Duplex, Plastic, OS2, ceramic, f. fl. fără flanșă, verde, capac anti-praf, CLASSIC	HSELSK09MR
Cuplor FO FTTH SC/APC Simplex, Plastic, OS2, ceramic, f. fl. fără flanșă, verde, capac anti-praf, CLASSIC	HSELSK09GR
Pigtail FTTH LC/APC 8°, 9/125μm OS2 G657.A2, 1.0m, 4 pcs Easy Strip, colorate conform IEC 60304, CLASSIC	HLP09M041P
Pigtail FTTH SC/APC 8°, 9/125μm OS2 G657.A2, 1.0m, 4 pcs Easy Strip, colorate conform IEC 60304, CLASSIC	HLP09D041P
Instrument de curățare a fibrei optice pentru LC și MU Potrivit pentru conectori UPC și APC. Peste 1.000 de cicluri de curățare.	HSELSZT001
Instrument de curățare FO pentru SC, ST, FC și E2000 Potrivit pentru conectori UPC și APC. Peste 1.000 de cicluri de curățare.	HSELSZT002
Tester profesional fibră optică cu laser VFL Test cablu cupru RJ45 .ATENȚIE: Acesta este un produs Laser Clasa 2 .Nu priviți direct în fascicul. Păstrați întotdeauna capacul pe portul VFL atunci când nu este utilizat. Se recomandă utilizarea ochelarilor de protecție laser atunci când lucrați cu sisteme de fibră optică.	HSELSZT003