


Date tehnice pentru produs: BK080158--

Dulap distrib. apl, 4 rând. 72UH, ușă din plastic alb mat

Î=654mm, L=395mm, A=112mm, IP40, ABS, fără halogen, RAL 9003, clasă de protecție 2



SCHRACK-Info

- Wall-mounted domestic consumer unit enclosures in ABS with solid plastic doors
- Lock: push-button, a small cylinder can be installed
- Includes PE and N terminals
- Protection class II
- Halogen free according to RoHS
- Rated voltage 400VAC / In=63A
- Ambient temperature: -25° to +60°C
- Glow wire test: 650°C
- Degree of protection: IP40, Impact resistance: IK08
- RAL9010 pure white




Fișe tehnice

Lățime netă (mm)	395,00
Înălțime (mm)	654,00

Fișe tehnice - Continuare

Adâncime netă (mm)	112,00
Masă netă (kg.)	3,00
COD EAN	9004840908336
disipare (W)	-68,00
Temperatura minimă a mediului ambiant (°C)	-25
Temperatura maximă a mediului ambiant (°C)	60
Material ușă	plastic
Fără halogen	Yes
Versiune	cu ușă pe tencuială
Rânduri	4
module / rând	18
grad de protecție	IP40
Culoare	RAL 9003

Desen dimensional: Dulap distrib. apl, 4 rând. 72UH, ușă din plastic alb mat

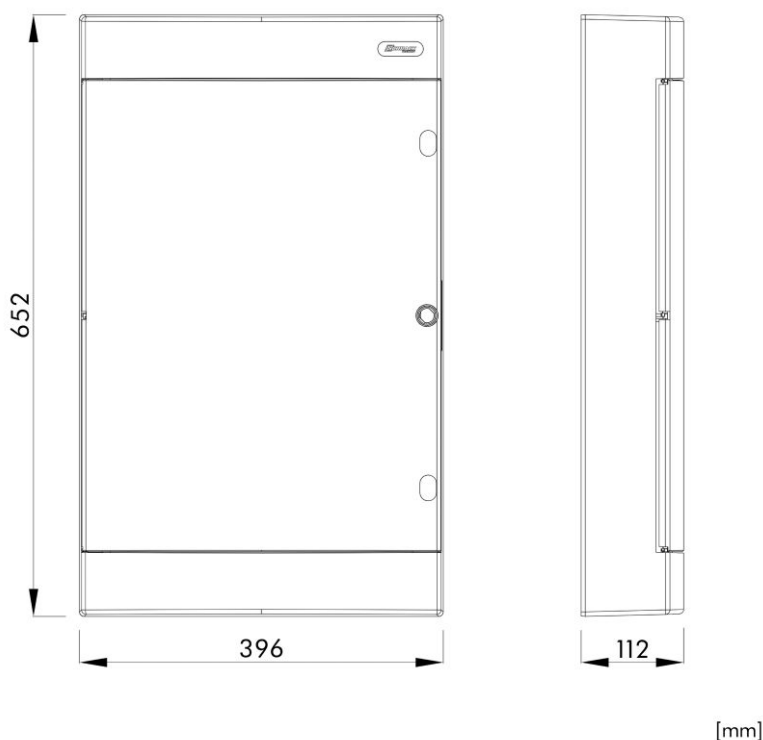

Tabel articole

Descriere	Cod comandă
Dulap distrib. apl, 4 rând. 72UH, ușă din plastic alb mat Î=654mm, L=395mm, A=112mm, IP40, ABS, fără halogen, RAL 9003, clasă de protecție 2	BK080158
Accesorii opționale	
Încuietoare cilindru metalic pentru BK08... IP40	BK080096