

Date tehnice pentru produs: DSS4280803

Dulap Server DSS, 2 uși p, 800x1970x800mm, 1500kg, 19", 42U

ATENȚIE !!! - expedierea acestor produse prin curier se face doar pe răspunderea clientului, există riscul deteriorării sale în timpul transportului.



SCHRACK-Info

- Welded powder-coated sheet steel skeleton 2,0 mm
- Height: 42 U
- Width: 800 mm
- Other dimensions and Datacenter-version with flat roof for cold-aisle are available upon request.
- Depth: 800mm
- Colour: light grey RAL 7035, frame blue RAL 5005
- Maximum static load: 1.800 kg
- Degree of protection: IP20
- IP54 version with Front Glas-door and rearpanel full-metal available upon request.
- Frontdoor full width, Perforated 80% Permeability with handsome swing handle. Prepared for half-cylinder type locks. Halfcylinder lock (Ordernumber: DV900333), Depth= 40mm, Diameter= 17mm, Fixing= M5 Screw, optional available.
- Doors hinged right. Can be changed to hinging on left.
- Frontdoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Removeable and lockable side-panels. Key included.
- Reardoor Double-wing, Perforated 80% Permeability with handsome swing handle. Reardoor can be replaced by optional DSRT doors (Glas, Full metal or Perforated, Full width or Double-wing).
- Heavy-Duty base optional: Height = 120 mm

- 19" rails (4 pcs.) galvanised, continuously depthadjustable. Numbering if Height-Units (U) by laser for easy readability.
- In 800 mm wide DSS enclosures, you can choose to adjust the 19" rails to a width of 21".
- In 1.000 mm deep DS enclosures, there is an additional pair of vertical rails installed in half depth. This makes installation of high depth accessories together with standard accessories possible at the same time.
- Space between front vertical 19"-rail and door glass at max. spacing:
 - W600 – 30 mm
 - W800 – 50 mm
- Space between rear vertical 19"-rail and rear panel at max. spacing:
 - W600 – 30 mm
 - W800 – 55 mm
- Maximum distance between vertical rails (19"-rails) in free-standing cabinets:
 - W600 x D800 – 730 mm
 - W600 x D1000 – 930 mm
 - W800 x D800 – 670 mm
 - W800 x D1000 – 870 mm
- Maximum usable depth in free-standing cabinets when installed e.g. on shelves:
 - D800 – 775 mm
 - D1000 – 975 mm
- Spacing between vertical 19"-rails: 451 mm
- Roof construction with opening, 19" punched. Flexible covered by removable plates of different heights to allow installation of fan-units and cable-entry panels. Remaining opening can be closed by use of one these plates.
 - D800 - Opening: 10 U, Covering: 2 x 4 U and 1 x 2 U
 - D1000 - Opening: 12 U, Covering: 2 x 4 U and 2 x 2 U
- Floor construction with opening, 19" punched. Covered by removable plate in full height.
 - D800 - Opening: 10 U, Covering: 1 x 10 U
 - D1000 - Opening: 12 U, Covering: 1 x 12 U
- Roof unit assemblies can also be fitted to floor section. Standard base required.
- Cable entry possible via roof, base and rear panel. Delivered with demountable or break-out blanking plates.
- Brush strip panel for roof (DBK24800) optional.
- Air vents for passive ventilation
- Earthing:
 - M8-Earthing point plus 19"-Earthingset in the rear of the cabinet
 - FastOn-Earthing-connections to all dismountable parts pre-installed
- Included assembly materials:
 - 16 x Cage nuts, bolts and washers M6
 - 4 x Levelling feet
 - 1 x Brush
 - 1 x Edge Protection for cable-entry
- Wide range of available accessories (fan-units, cable entry panels, fixed shelves, patch panels, cable management, PDUs, doors, etc.).
- Enclosure is delivered completely assembled on a disposable pallet.


Fișe tehnice

Lățime netă (mm)	800,00
Înălțime (mm)	1.970,00

Fișe tehnice - Continuare

Adâncime netă (mm)	800,00
Masă netă (kg.)	131,00
Temperatura minimă a mediului ambiant (°C)	0
Temperatura maximă a mediului ambiant (°C)	40
Pentru unități	42U-1970mm
Culoare	RAL 7035 / RAL 5005 (light grey / blue)

Desen dimensional: Dulap Server DSS, 2 uși p, 800x1970x800mm, 1500kg, 19", 42U

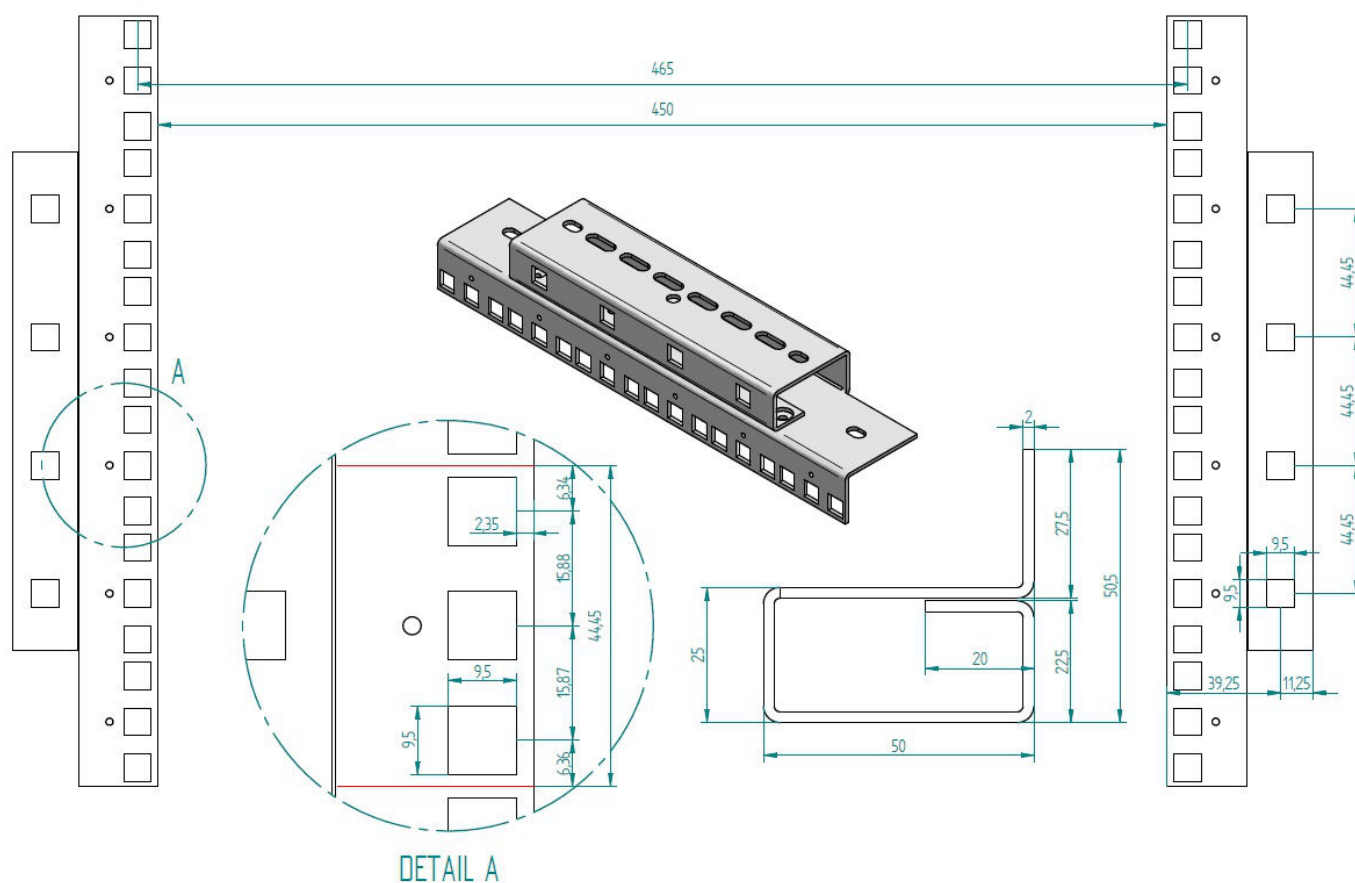

Tabel articole

Descriere	Cod comandă
Dulap Server DSS, 2 uși p, 800x1970x800mm, 1500kg, 19", 42U	
ATENȚIE !!! - expedierea acestor produse prin curier se face doar pe răspunderea clientului, există riscul deteriorării sale în timpul transportului.	DSS4280803
Accesorii opționale	
Insert (butuc) semi-cilindric EK 333 + 1 cheie	DV900333
Suport intrare cabluri 2U	DBK24800
Unitate cu 2 ventilatoare 19" cu termostat	DLT44802-A
Element adâncime soclu 800mm pt.dulap DSS, 1500kg (1 per)	DSSOT1280
Profil latime soclu perforat + filtru 800mm	DSOF1283
Organizator cabluri 5 inele metalice mari 80x40mm, 1U	DBC14805
Organizator cabluri 19", 1U, 5 inele de plastic mari 40x83mm	DBK14805
Tava fixa 19" 450mm sarcina 80kg	DFS14845-C
PDU 9xSchuko, 19", Profil ALU 1U, cablu 3m, RAL7035	IU070114-3
PDU 19",7xSchuko+prot suprat, prof PVC 1,25U,cabl 2m,RAL7035	IU070113
PDU 9x Schuko, 19", 1U, cablu 2m,comutator on/off negru,ALU ALU Profil	Q7070114-A
PDU 19", 7xSchuko, Comutator, protecție supratensiune, 1U cablu 2m, negru	Q7070113-A
PDU IT METER LINE pasiv, IN: 1xC EE 16A roșu, OUT: 12xprize C	HSMPP312
PDU IT METER LINE cu contor de energie integrat, 3 fazat, IN	HSMMP336
Suport PDU pentru dulapuri DSS cu lățimea de 600 și 800mm, 1U 1 pereche = 2 buc.	DSSPDU010
Suport PDU pentru dulapuri DSS cu lățimea de 600 și 800mm, 2U 1 pereche = 2 buc.	DSSPDU021
Suport PDU pentru dulapuri DSS cu lățimea de 600 și 800mm, 2U 1 pereche = 2 buc.	DSSPDU022
Set fixare profil 19"(50buc.)	DSSRA050
Contrapanou 19", 14U, oțel, perforat inclusiv suruburi și contrapiulițe	DMP1914
Lampă LED, magnet, 230VAC, cu senzor deschidere ușă aprindere automată cand ușa este deschisă	DTLIGHT01
Switch 24xRJ45 10/100/1000,silențios,f.vent.,alim.intern Carcasă metalică, 19"	QLGSW2457
Patchpanel pt. 24 module TOOLLESS LINE, 1UH, 19", RAL7035	HSER0240GS