

Date tehnice pentru produs: HDCR100169

# IS-1 Colocation Enclosure 2-parts 80x220x100 RAL7035

lightgrey



## SCHRACK-Info

**Compartments:** 2

**U/Compartment:** 23

**Material:**

Basic frame: 1.50mm steel sheet

Doors: 1.50mm steel sheet

Side panels: 1.50mm steel sheet

482.6 mm (19") mounting angles: 2.00mm steel sheet

**Finish:**

Frame and cladding parts: powder-coated

Internal fittings: galvanised

**Static load capability:** 25kg per U

**Frame clearance, front:** 112mm

**Installation depth:** 747mm

**Equipment:**

- 1 basic frame, demountable, with integrated 25-mm mounting hole pitch pattern on all sides
- 4 galvanised 482.6mm (19") mounting angles per compartment for cage nuts acc. to IEC 297 d EIA, including height unit labelling
- Lateral airflow routing panel at front of each compartment
- Per compartment, 1 single wing front door, passive venting (free clearance 81%), with swing handle, prepared for DIN profile half cylinder (30/10), 2- point locking system

- Per compartment, 1 single wing rear door, passive venting (free clearance 81%), with swing handle, prepared for DIN profile half cylinder (30/10), 2- point locking system
- 2 double-wing side panels, screw fastened n 1 top cover, single part, solid (only width 600) or with cable entry aperture (on width 800)
- Depending on the version, 2 or 3 solid partition plates
- 1 bottom cover, solid with cable entry apertures, depending on the model
- 1 or 2 cable ducts for B600 / 2 or 4 cable ducts for B800
- 4 levelling feet, incl. protective caps (provided)
- 1 earthing set, mounted (all flat components earthed, central earthing point)


#### Inspections/Norms

- Earthing in acc. with DIN VDE 0100-540
- Components in acc. with IEC 297-1/2 (19")


## Fișe tehnice

|                                            |             |
|--------------------------------------------|-------------|
| Lățime netă (mm)                           | 800,00      |
| Înălțime (mm)                              | 2.200,00    |
| Adâncime netă (mm)                         | 1.000,00    |
| Culoare                                    | Gri deschis |
| UV                                         | 46          |
| Masă netă (kg.)                            | 165,00      |
| Temperatura minimă a mediului ambiant (°C) | -10         |
| Temperatura maximă a mediului ambiant (°C) | 60          |
| Grad de protecție                          | IP20        |

## Desen dimensional: IS-1 Colocation Enclosure 2-parts 80x220x100 RAL7035

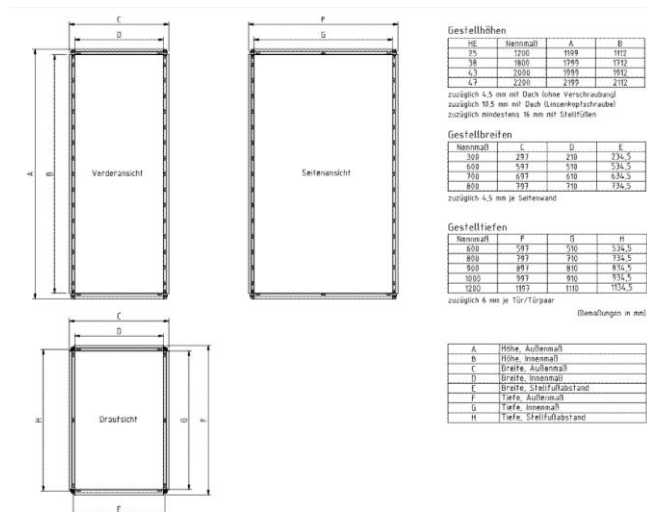

## Desen dimensional: IS-1 Colocation Enclosure 2-parts 80x220x100 RAL7035

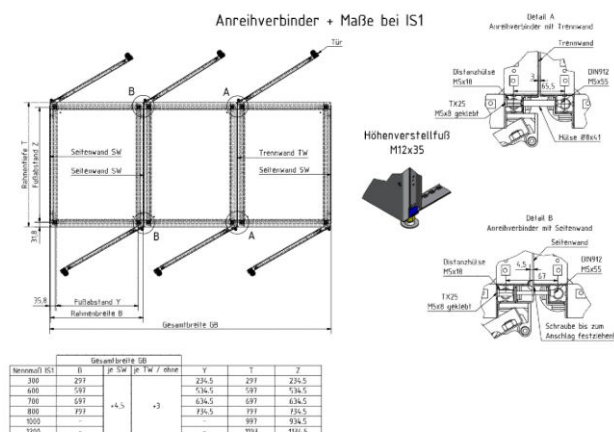

Descriere

Cod comandă

IS-1 Colocation Enclosure 2-parts 80x220x100 RAL7035

HDCR100169

lightgrey