


Date tehnice pentru produs: HLP23LT10F

Patchcablu duplex LC/ST, 50/125µm OM3, LSOH-3, aqua, 10m



SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - ST/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS


- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks
- ATM, SONET and WDM

OM3 LSOH

Fișe tehnice

Standard produs	IEC 61300-3-4 / IEC 61300-3-6
Conector standard	IEC 61754
Combinăție conectori	LC/ST
Lungime patchcord (m.)	10,0
Fibră	50/125 μ OM3 multimode
Manta	LSOH
Culoare	aqua
Pierdere de inserție tipică (dB)	$\leq 0,25$
Pierderi pe retur tipice (dB)	≥ 30
Temperatura minimă a mediului ambiant (°C)	-20
Temperatura maximă a mediului ambiant (°C)	60
Lățime netă (mm)	210,00
Înălțime (mm)	320,00
Masă netă (kg.)	0,26

Desen dimensional: Patchcablu duplex LC/ST, 50/ 125 μ m OM3, LSOH-3, aqua, 10m

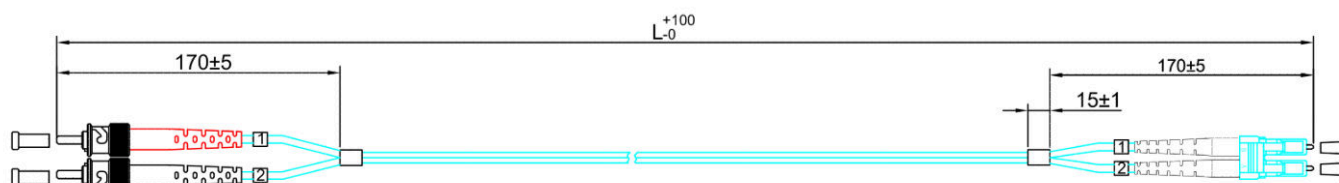

Descriere

Cod comandă

Patchcablu duplex LC/ST, 50/125µm OM3, LSOH-3, aqua, 10m

HLP23LT10F