

Date tehnice pentru produs: HLP29MM00F

FO Patchcord Duplex LC/APC - LC/APC, 9/125µm OS2, 0.5m

LSOH, yellow



Schrack-Info

Single mode patch cords are used for telecom networks and also used for high speed metropolitan and access network. The single-mode patch cables are equipped with an LSOH jacket. These comply with IEC or EIA-TIA standards. These singlemode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/APC - LC/APC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Singlemode cabled fiber conforms to ITU-T G.657.A2, IEC 60793-2-50
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Fișe tehnice

Lățime netă (mm)	150,00
Înălțime (mm)	200,00
Masă netă (kg.)	0,04
Standard produs	IEC 61300-3-4 / IEC 61300-3-6
Conector standard	IEC 61754
Combinatie conectori	LC APC/LC APC
Lungime patchcord (m.)	0,50
Fibră	9/125μ OS2 singlemode
Manta	LSOH
Culoare	Galben
Diametru (mm)	2 x 2,2
Pierdere de inserție tipică (dB)	≤0,25
Pierderi pe retur tipice (dB)	≥60
Temperatura minimă a mediului ambiant (°C)	-20
Temperatura maximă a mediului ambiant (°C)	60

Desen dimensional: FO Patchcord Duplex LC/APC - LC/APC, 9/ 125μm OS2, 0.5m

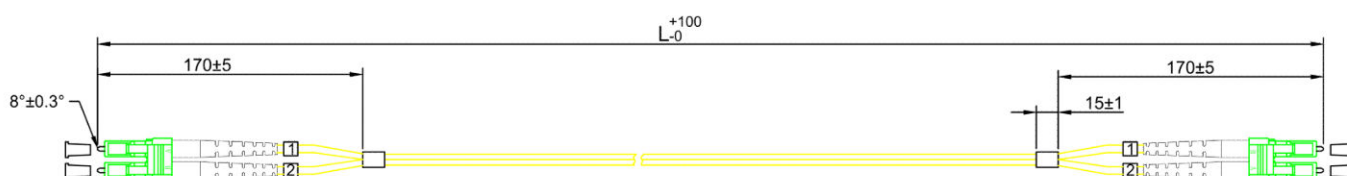

Descriere	Cod comandă
FO Patchcord Duplex LC/APC - LC/APC, 9/125μm OS2, 0.5m LSOH, yellow	HLP29MM00F