


Date tehnice pentru produs: HLP2SLL00F

FO Patchcord Duplex LC/UPC - LC/UPC, 50/125µm OM5, 0.5m

LSOH, lime green



SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

FEATURES

- LC/UPC - LC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



Fișe tehnice

Lățime netă (mm)	150,00
Înălțime (mm)	200,00
Masă netă (kg.)	0,04
Standard produs	IEC 61300-3-4 / IEC 61300-3-6
Conector standard	IEC 61754
Combinație conectori	LC/LC
Lungime patchcord (m.)	0,50
Fibră	50/125 OM5 Multimode
Manta	LSOH
Culoare	verde lime
Pierdere de inserție tipică (dB)	$\leq 0,25$
Pierderi pe retur tipice (dB)	≥ 30
Temperatura minimă a mediului ambiant (°C)	-20
Temperatura maximă a mediului ambiant (°C)	60

Desen dimensional: FO Patchcord Duplex LC/UPC - LC/UPC, 50/125μm OM5, 0.5m

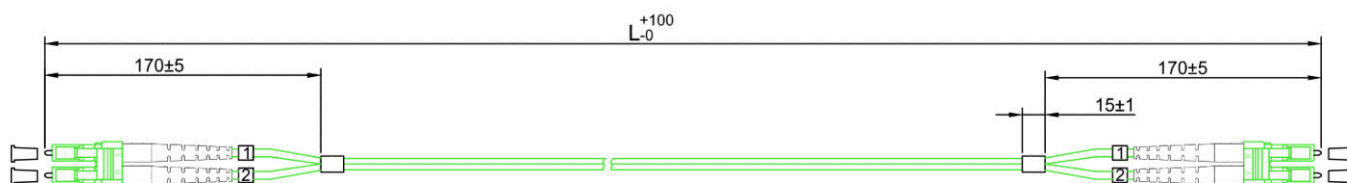

Descriere	Cod comandă
FO Patchcord Duplex LC/UPC - LC/UPC, 50/125μm OM5, 0.5m LSOH, lime green	HLP2SLL00F