


Date tehnice pentru produs: IL164124TS

Unterputz-Zählerverteiler 1U-24E/TIR 1ZP, H1195B380T250mm

1 Panou contor, 1 Rânduri de contoare, 2 Rânduri în aval, Tyrol, Mască frontală tablă de oțel

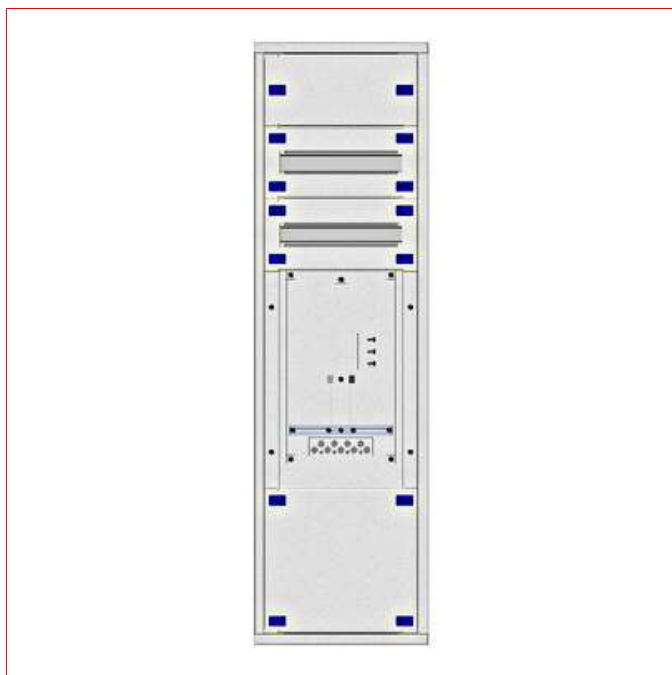

SCHRACK-Info

- Modular aufgebauter Unterputzverteiler mit Tür und Mauerwanne
- Material: 1mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit einem Kunststoff-Drehriegelverschluss mit Doppelbartsperr. Beim IL308524-F und ab 28 Modulhöhen sind 2 Drehriegel pro Tür ausgeführt
- Die Ausführung des Vorzählerteils besteht aus einer plombierbaren Abdeckung mit montierter Alu/HC Schiene und einer Montageplatte ab 4 Zählerplätze
- Bemessungsspannung U_e : 230/400V/50Hz
- Bemessungsisolationsspannung U_i : 1000V
- Bemessungsstoßspannungsfestigkeit U_{imp} : 6kV
- Bemessungskurzzeitstromfestigkeit I_{cw} : 25kA / 1s
- Bemessungsstoßstromfestigkeit I_{pk} : 54kA
- Bedingter Bemessungskurzschlussstrom I_{cc} : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- Farbe: RAL9016 (Verkehrsweiß)
- komplett bestückt und vorverdrahtet auf Anfrage



Fișe tehnice

Lățime netă (mm)	380,00
Înălțime (mm)	1.195,00
Adâncime netă (mm)	250,00
COD EAN	9004840641998
disipare (W)	-193,00
Categorie produs	UP-Verteiler mit Zählereinsatz kompl.
Regiune Austria	Tyrol
Componente insert	mască frontală metalice
Culoare	RAL9016
Lățime panou contor	1
UV	24
Rânduri de contoare	1
Panou contor	1
grad de protecție	IP20C
Rânduri în aval	2
Mască frontală	tablă de oțel
Descriere de bază	Dulap
Lățime modul	26

Tabel articole

Descriere	Greutate cupru (kg/km)	Cod comandă
Unterputz-Zählerverteiler 1U-24E/TIR 1ZP, H1195B380T250mm		IL164124TS
1 Panou contor, 1 Rânduri de contoare, 2 Rânduri în aval, Tyrol, Mască frontală tablă de oțel		
Accesorii opționale		
Broască cu cheie 61005, pt. M2000		IL900200-F
Etichetă inscripționare autoadezivă, 10mm x 1m		BK002401
Fâșie acoperire decupaj 45mm lungime 1m, gri		IL900251
Set piese asociere verticală		IL369001
2 pcs. connectors and 4 pcs. M5x12 screws		
Broasca cu cheie tip Z pt.M2000 - 2 chei în set		IL900201-F

Tabel articole

Descriere	Greutate cupru (kg/km)	Cod comandă
Accesorii opționale		
Plug-in counter bar 50A for Vienna, Tyrol and Styria		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m		
Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824