


Date tehnice pentru produs: IL166245WS

# Unterputz-Zählerverteiler 2U-45G/WIEN 4ZP, H2160B590T250mm

4 Panou contor, 2 Rânduri de contoare, 7 Rânduri în aval, Vienna, Mască frontală tablă de oțel

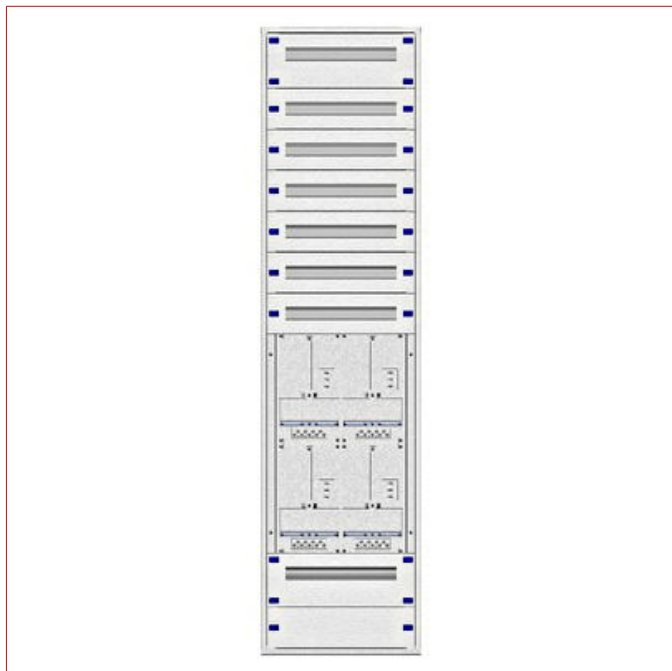

## SCHRACK-Info

- Modular aufgebauter Unterputzverteiler mit Tür und Mauerwanne
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit einem Kunststoff-Drehriegelverschluss mit Doppelbartsperr. Beim IL308524-F und ab 28 Modulhöhen sind 2 Drehriegel pro Tür ausgeführt
- Die Ausführung des Vorzählerteils besteht aus einer Gerätefrontplatte mit 45mm Geräteausschnitt oder einer plombierbaren Abdeckung mit montierter Alu/HC Schiene oder SHC-Schiene
- Bemessungsspannung  $U_e$ : 230/400V/50Hz
- Bemessungsisolationsspannung  $U_i$ : 1000V
- Bemessungsstoßspannungsfestigkeit  $U_{imp}$ : 6kV
- Bemessungs kurzzeitstromfestigkeit  $I_{cw}$ : 25kA / 1s
- Bemessungsstoßstromfestigkeit  $I_{pk}$ : 54kA
- Bedingter Bemessungs kurzschlussstrom  $I_{cc}$ : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- Farbe: RAL9016 (Verkehrsweiß) • komplett bestückt und vorverdrahtet auf Anfrage



## Fișe tehnice

|                     |                                       |
|---------------------|---------------------------------------|
| Lățime netă (mm)    | 590,00                                |
| Înălțime (mm)       | 2.160,00                              |
| Adâncime netă (mm)  | 250,00                                |
| COD EAN             | 9004840630619                         |
| disipare (W)        | -467,00                               |
| Categorie produs    | UP-Verteiler mit Zählereinsatz kompl. |
| Regiune Austria     | Vienna                                |
| Componente insert   | mască frontală metalice               |
| Culoare             | RAL9016                               |
| Lățime panou contor | 2                                     |
| UV                  | 45                                    |
| Rânduri de contoare | 2                                     |
| Panou contor        | 4                                     |
| grad de protecție   | IP20C                                 |
| Rânduri în aval     | 7                                     |
| Mască frontală      | tablă de oțel                         |
| Descriere de bază   | Dulap                                 |
| Lățime modul        | 147                                   |

## Tabel articole

| Descriere                                                                                                                                                                                                                                                                                                                                                      | Greutate cupru (kg/km) | Cod comandă |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-------------|
| Unterputz-Zählerverteiler 2U-45G/WIEN 4ZP, H2160B590T250mm<br>4 Panou contor, 2 Rânduri de contoare, 7 Rânduri în aval, Vienna, Mască frontală tablă de oțel                                                                                                                                                                                                   |                        | IL166245WS  |
| <b>Accesorii opționale</b>                                                                                                                                                                                                                                                                                                                                     |                        |             |
| Broască cu cheie 61005, pt. M2000                                                                                                                                                                                                                                                                                                                              |                        | IL900200-F  |
| Etichetă inscripționare autoadezivă, 10mm x 1 m                                                                                                                                                                                                                                                                                                                |                        | BK002401    |
| Fâșie acoperire decupaj 45mm lungime 1m, gri                                                                                                                                                                                                                                                                                                                   |                        | IL900251    |
| Set piese asociere verticală<br>2 pcs. connectors and 4 pcs. M5x12 screws                                                                                                                                                                                                                                                                                      |                        | IL369001    |
| Broasca cu cheie tip Z pt.M2000 - 2 chei in set                                                                                                                                                                                                                                                                                                                |                        | IL900201-F  |
| Plug-in counter bar 50A for Vienna, Tyrol and Styria<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019         |                        | IL900189    |
| Plug-in counter bar 50A, PU = 64 Pieces<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019                      |                        | IL900189-A  |
| Plug-in counter bar pins 63A, 44mm, PU=7 pieces                                                                                                                                                                                                                                                                                                                |                        | IL900190    |
| Cover for Plug-in counter bars                                                                                                                                                                                                                                                                                                                                 |                        | IL900191    |
| Meter Connection Terminal 50A for Czech Republic, wired 1,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 975                    | IL901816    |
| Meter Connection Terminal 50A for Czech Republic, wired 1,8m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1350                   | IL901820    |
| Meter Connection Terminal 50A for Czech Republic, wired 2,3m<br>Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm <sup>2</sup> , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019 | 1725                   | IL901824    |