


Date tehnice pentru produs: IL166445WS

Unterputz-Zählerverteiler 4U-45G/WIEN 8ZP, H2160B 1030T250mm

8 Panou contor, 2 Rânduri de contoare, 7 Rânduri în aval, Vienna, Mască frontală tablă de oțel

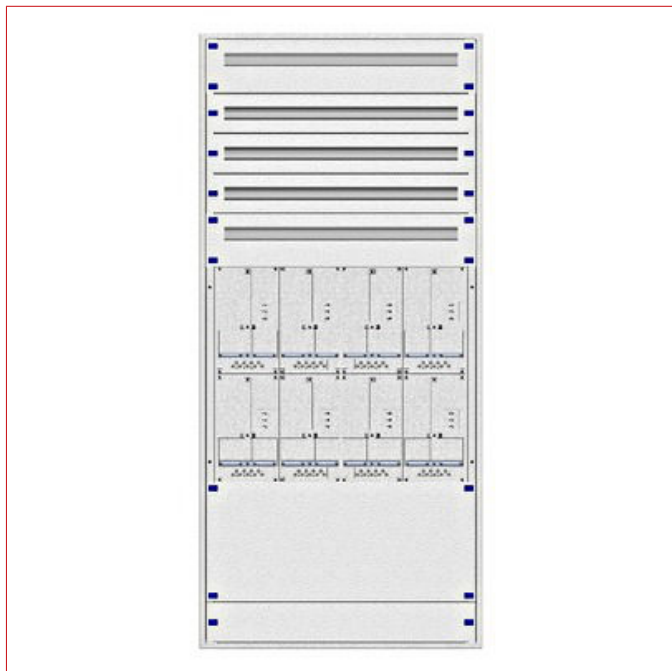

SCHRACK-Info

- Modular aufgebauter Unterputzverteiler mit Tür und Mauerwanne
- Material: 1 mm pulverbeschichtetes Stahlblech
- Phosphatierter, kunststoffpulverbeschichteter Stahlblechverteiler geprüft und zertifiziert nach EN 62208:2011 und EN 60529:1991, Schutzklasse I für TT/TN und IT Netzform geeignet, schutzisoliert nach ÖVE-IM 12
- Standardmäßig mit einem Kunststoff-Drehriegelverschluss mit Doppelbartsperr. Beim IL308524-F und ab 28 Modulhöhen sind 2 Drehriegel pro Tür ausgeführt
- Die Ausführung des Vorzählerteils besteht aus einer Gerätefrontplatte mit 45mm Geräteausschnitt oder einer plombierbaren Abdeckung mit montierter Alu/HC Schiene oder SHC-Schiene
- Bemessungsspannung U_e : 230/400V/50Hz
- Bemessungsisolationsspannung U_i : 1000V
- Bemessungsstoßspannungsfestigkeit U_{imp} : 6kV
- Bemessungs kurzzeitstromfestigkeit I_{cw} : 25kA / 1s
- Bemessungsstoßstromfestigkeit I_{pk} : 54kA
- Bedingter Bemessungs kurzschlussstrom I_{cc} : 25kA
- Schutzklasse: I
- EMV: EMV Umgebung 1
- Farbe: RAL9016 (Verkehrsweiß) • komplett bestückt und vorverdrahtet auf Anfrage



Fișe tehnice

Lățime netă (mm)	1.030,00
Înălțime (mm)	2.160,00
Adâncime netă (mm)	250,00
COD EAN	9004840630718
disipare (W)	-738,00
Categorie produs	UP-Verteiler mit Zählereinsatz kompl.
Regiune Austria	Vienna
Componente insert	mască frontală metalice
Culoare	RAL9016
Lățime panou contor	4
UV	45
Rânduri de contoare	2
Panou contor	8
grad de protecție	IP20C
Rânduri în aval	7
Mască frontală	tablă de oțel
Descriere de bază	Dulap
Lățime modul	315

Tabel articole

Descriere	Greutate cupru (kg/km)	Cod comandă
Unterputz-Zählerverteiler 4U-45G/WIEN 8ZP, H2160B1030T250mm 8 Panou contor, 2 Rânduri de contoare, 7 Rânduri în aval, Vienna, Mască frontală tablă de oțel		IL166445WS
Accesorii opționale		
Broască cu cheie 61005, pt. M2000		IL900200-F
Etichetă inscripționare autoadezivă, 10mm x 1 m		BK002401
Fâșie acoperire decupaj 45mm lungime 1m, gri		IL900251
Set piese asociere verticală 2 pcs. connectors and 4 pcs. M5x12 screws		IL369001
Broasca cu cheie tip Z pt.M2000 - 2 chei in set		IL900201-F
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824