


Date tehnice pentru produs: IL413539-A

Zählerverteiler Einsatz 5-39E, 5 Zählerplätze, Tirol

Frontblende Stahlblech, komplett

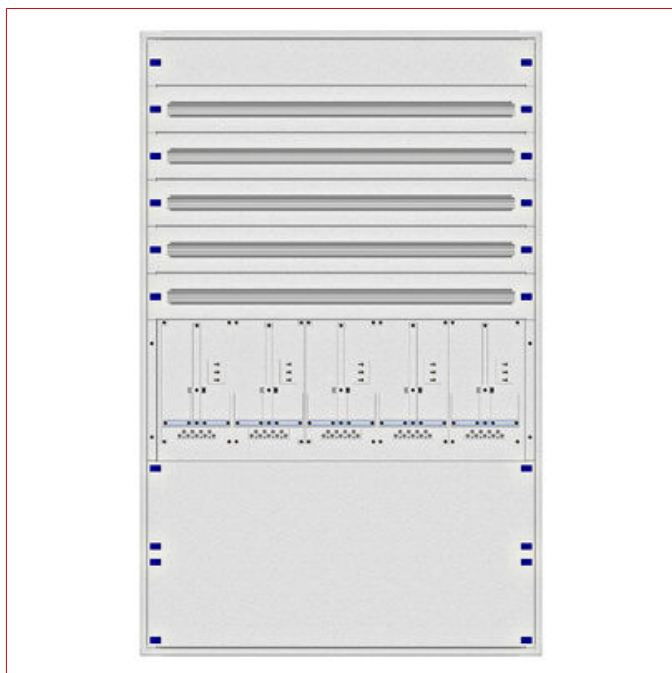

Fișe tehnice

Lățime netă (mm)	1.140,00
Înălțime (mm)	1.795,00
Adâncime netă (mm)	150,00
COD EAN	9004840966947
Categorie produs	Zählerverteilereinsatz
Regiune Austria	Tyrol
Componente insert	mască frontală metalice
Culoare	RAL7035
Lățime panou contor	5
UV	39
Rânduri de contoare	1
Panou contor	5
Rânduri în aval	5
Descriere de bază	Insert

Tabel articole

Descriere	Greutate cupru (kg/km)	Cod comandă
Zählerverteiler Einsatz 5-39E, 5 Zählerplätze, Tirol Frontblende Stahlblech, komplett		IL413539-A
Accesorii opționale		
Conductor împământare L=300mm/Myf 6mmp cu piulițe și șaibe		IL900099
Plug-in counter bar 50A for Vienna, Tyrol and Styria Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189
Plug-in counter bar 50A, PU = 64 Pieces Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019		IL900189-A
Plug-in counter bar pins 63A, 44mm, PU=7 pieces		IL900190
Cover for Plug-in counter bars		IL900191
Meter Connection Terminal 50A for Czech Republic, wired 1,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	975	IL901816
Meter Connection Terminal 50A for Czech Republic, wired 1,8m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1350	IL901820
Meter Connection Terminal 50A for Czech Republic, wired 2,3m Smart Meter Terminal 3pole +2N, Test overload current 80A for 1h, Power loss 3,3W at 50A over all three phases, 400VAC, 50Hz, Conductor Material Copper 2,5-16mm ² , flexible with crimped ferrule, Material Terminal Inserts from Silver-Plated Copper, RoHS konform, OVE R21:2019	1725	IL901824