

Date tehnice pentru produs: IS010131 --

POWERTEC PF 25kA +H, T1 275, 3+1, pluggable, integr. fuse




Fișe tehnice

Circuit	3+1
Tensiune nominală maximă AC (VAC)	275(L-PE)/305(N-PE)
Impuls de curent (kA)	25(L-N)/100(N-PE)
Curent descărcare nominal (kA)	25(L-N)/100(N-PE)
Curent descărcat maxim (kA)	65(L-N)/150(N-PE)
Nivel de protecție (kV)	1900(L-PE)/1500(N-PE)
Module	8
Contact semnalizare	da
Tensiune nominală	240VAC
Rezistență la scurtcircuit	100
Specific Energy (kJ/Ω)	156,20
Charge (As)	12,5(L-N)/50(N-PE)
Timp de răspuns (ns)	<100
Overcurrent Protection (max) (A gG)	nicht notwendig
TOV SafeFail 120min (L-N) (V)	442
TOV Withstand 200ms (N-PE) (V)	1200
Capacitate de comutare a curentului de urmărire (A)	100


Fișe tehnice - Continuare

Open Circuit Voltage of Combination Wave Generator (1,2/50μs) (kV)	6
Short Circuit Current of Combination Wave Generator (8/20μs) (kA)	3

Circuit diagram IS010131--

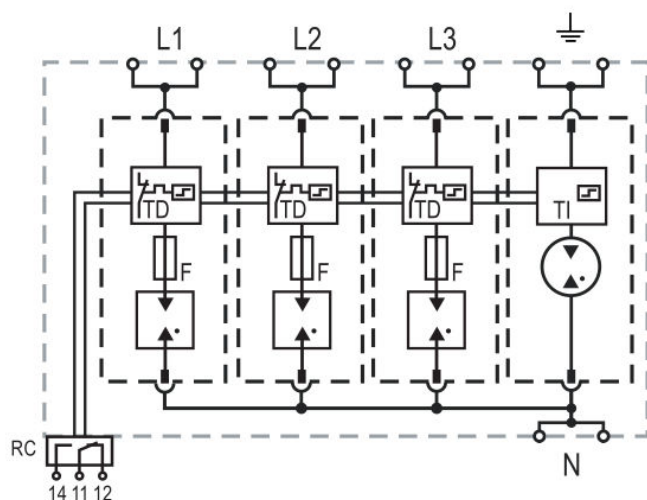

Dimension diagram IS010131-- [mm/inch]

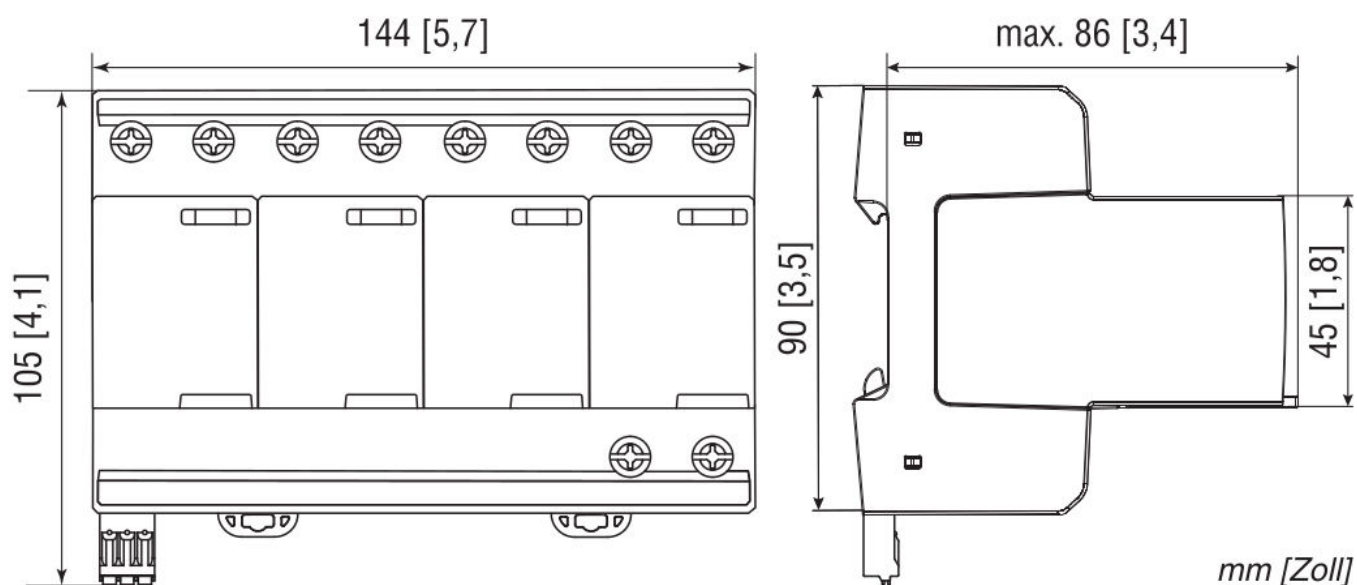

Descriere

Cod comandă

POWERTEC PF 25kA +H, T1 275, 3+1, pluggable, integr. fuse

IS010131