

Date tehnice pentru produs: IU070127-A

# Ramă simplă profil 19", L=616 x H=1365 x A=600, 27U



## SCHRACK-Info

These 19"- systemracks are used when access to the equipment from all sides is necessary all the time.

Also frequently used for presentation of 19"- devices in show-rooms or on exhibitions.

The single section racks are designed for installations without heavy equipment.

The double section racks are designed for installation of heavier and larger equipment.

The in the double section racks included stabilization set increases stability of the whole rack in case of installation of slide-out devices, e.g. servers.

### Installation:

- Direct on floor.
- By use of the included levelling feet in case of uneven floor.
- By use of optional castors with brake (Ordernumber: DSR00005-A).

### MOUNTING OF THE FRAME

- To ensure the maximum recommended load, it is necessary to distribute the load equally. It is necessary to prevent one-side or one -point loading of the frame.
- Place the frame on a flat floor and compensate an eventual small roughness with nivelation feet.

### CERTIFICATE AND CONFORMITY

- This product is fully in accordance with EN 62208 ed 2:2012.


## Fișe tehnice

|                                            |            |
|--------------------------------------------|------------|
| Lățime netă (mm)                           | 600,00     |
| Înălțime (mm)                              | 1.340,00   |
| Adâncime netă (mm)                         | 600,00     |
| Masă netă (kg.)                            | 19,00      |
| Temperatura minimă a mediului ambiant (°C) | 0          |
| Temperatura maximă a mediului ambiant (°C) | 40         |
| Pentru unități                             | 27U-1365mm |


## Tabel de date: Ramă simplă profil 19", L=616 x H=1365 x A=600, 27U

|            | A[mm] | B[mm] | D[mm] | E[mm] | Maximallast bei gleichmäßiger Verteilung[kg] | Gewicht Brutto[kg] | Gewicht Netto[kg] |
|------------|-------|-------|-------|-------|----------------------------------------------|--------------------|-------------------|
| IU070127-A | 1340  | -     | 600   |       | 150                                          | 24,2               | 19                |
| IU070141-A | 2005  | -     | 600   |       | 150                                          | 27,7               | 22,4              |
| IU070227-A | 1340  | 664   | 700   |       | 150                                          | 36,9               | 31,4              |
| IU070242-A | 2005  | 664   | 700   |       | 150                                          | 43,8               | 38,3              |

**Desen dimensional: Ramă simplă profil 19", L=616 x H=1365 x A=600, 27U**

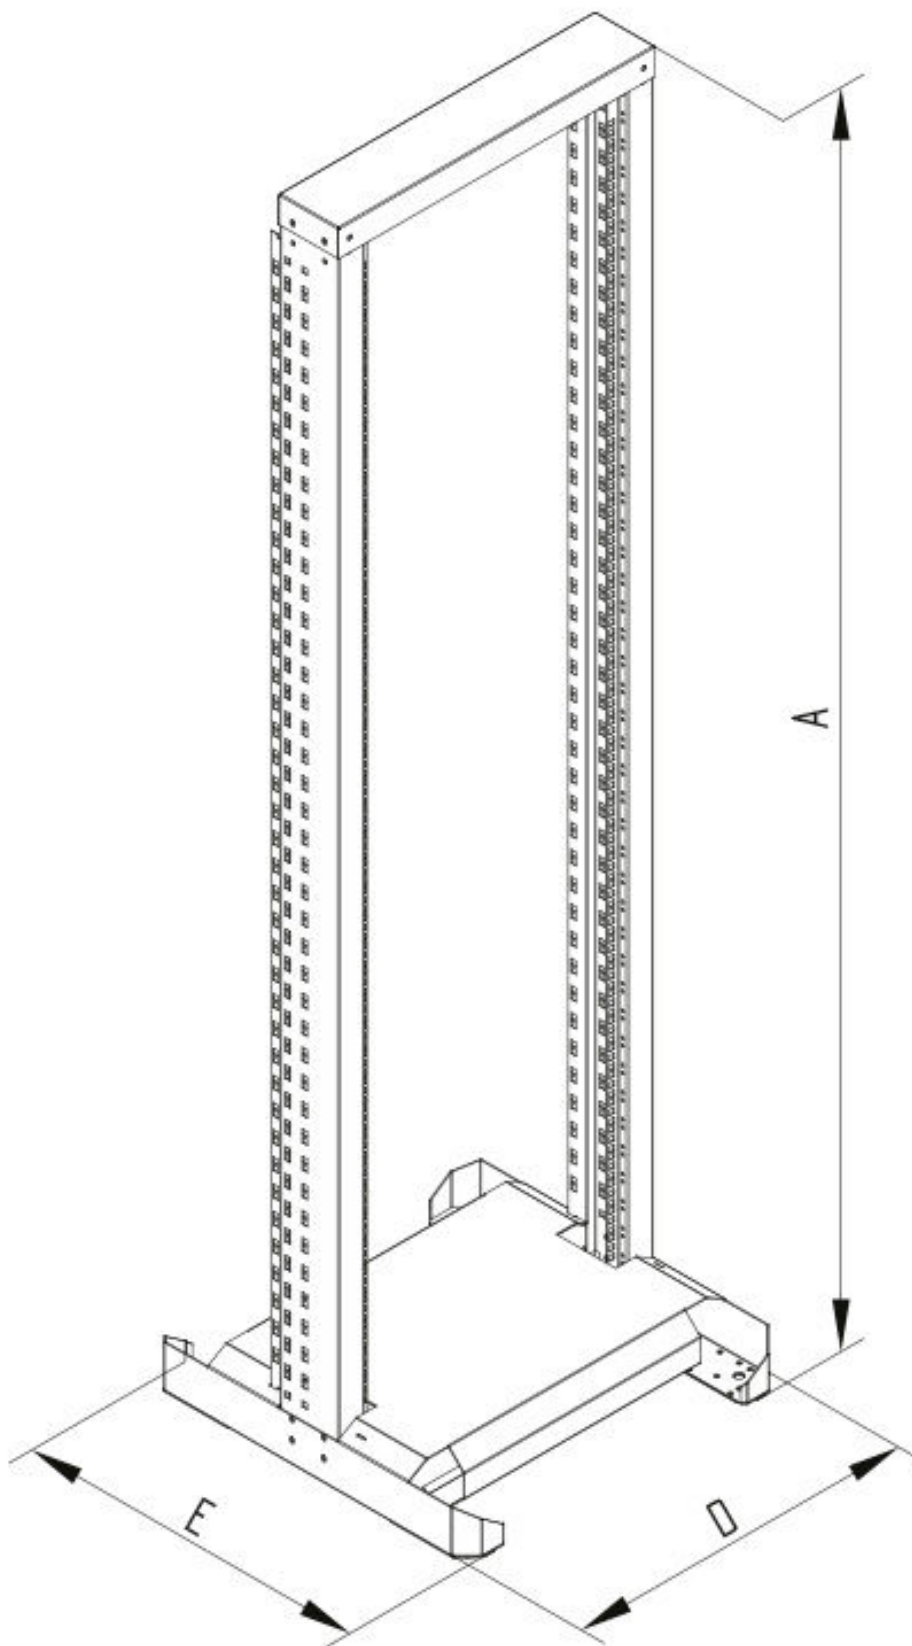

## Desen dimensional: Ramă simplă profil 19", L=616 x H=1365 x A=600, 27U

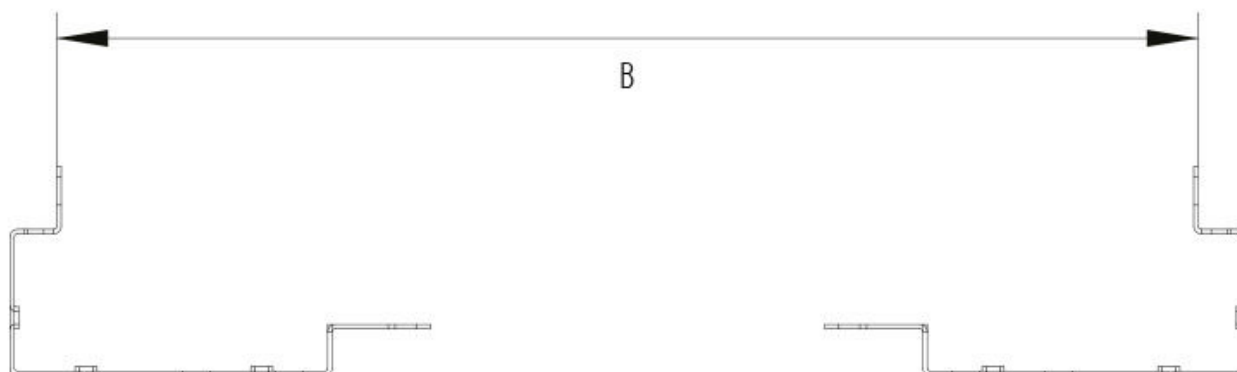

### Tabel articole

| Descriere                                                    | Cod comandă |
|--------------------------------------------------------------|-------------|
| Ramă simplă profil 19", L=616 x H=1365 x A=600, 27U          | IU070127-A  |
| <b>Accesorii opționale</b>                                   |             |
| Organizator cabluri 5 inele metalice mari 80x40mm, 1U        | DBC14805    |
| Organizator cabluri 19", 1U, 5 inele de plastic mari 40x83mm | DBK14805    |
| Tava fixa 19" 450mm sarcina 80kg                             | DFS14845-C  |
| PDU 19", 9xSchuko, profil ALU 1U, cablu conexiune 2m,RAL7035 | IU070114    |
| PDU 19",7xSchuko+prot suprat, prof PVC 1,25U,cabl 2m,RAL7035 | IU070113    |
| PDU 9x Schuko, 19", 1U, cablu 2m,comutator on/off negru,ALU  | Q7070114-A  |
| ALU Profil                                                   |             |

## Tabel articole

| Descriere                                                                                        | Cod comandă |
|--------------------------------------------------------------------------------------------------|-------------|
| <b>Accesorii opționale</b>                                                                       |             |
| PDU 19", 7xSchuko, Comutator, protecție supratensiune, 1U<br>cablu 2m, negru                     | Q7070113-A  |
| Set fixare profil 19"(50buc.)                                                                    | DSSRA050    |
| Contrapanou 19", 14U, oțel, perforat<br>inclusiv suruburi și contrapiulițe                       | DMP1914     |
| Lampă LED, magnet, 230VAC, cu senzor deschidere ușă<br>aprindere automată cand ușa este deschisă | DTLIGHT01   |
| Switch 24xRJ45 10/100/1000,silențios,f.vent.,alim.intern<br>Carcasă metalică, 19"                | QLGSW2457   |