

Date tehnice pentru produs: IUKTI6301A

Unitate racire 1.5kW, montaj partial ingropat, seria DTI

400V, adancime sectiune ingropata = 72mm, IP 55, RAL 7035



SCHRACK-Info

General:

- Cooling unit for partially recessed mounting (=DTI)
- For door or side mounting
- Compact design for smaller enclosures or to cool hot spots
- Technical design with a standard controller
- Color: RAL 7035 (Light grey)


IUKTI6301:

- Cooling performance: 1500W
- Rated voltage: 400V
- Very high energy efficiency ratio (EER)
- Service friendly due to direct access to the PCB and the fans, thus 80 % shorter repair times
- Type of connection: Spring-type terminal included with plug
- Installation depth: 62mm
- Degree of protection IP55: Towards the enclosure
- Degree of protection IP34: Towards the surroundings


Fișe tehnice

Lățime netă (mm)	418,00
Înălțime (mm)	962,00
Adâncime netă (mm)	244,00
Masă netă (kg.)	45,00
Temperatura minimă a mediului ambiant (°C)	15
Temperatura maximă a mediului ambiant (°C)	55
grad de protecție	IP55
Clasă de protecție	I
Tensiune nominală	400V-AC
Categorie produs	Unitate de răcire
Putere răcire (W)	1500

Kennlinien Kühlleistung

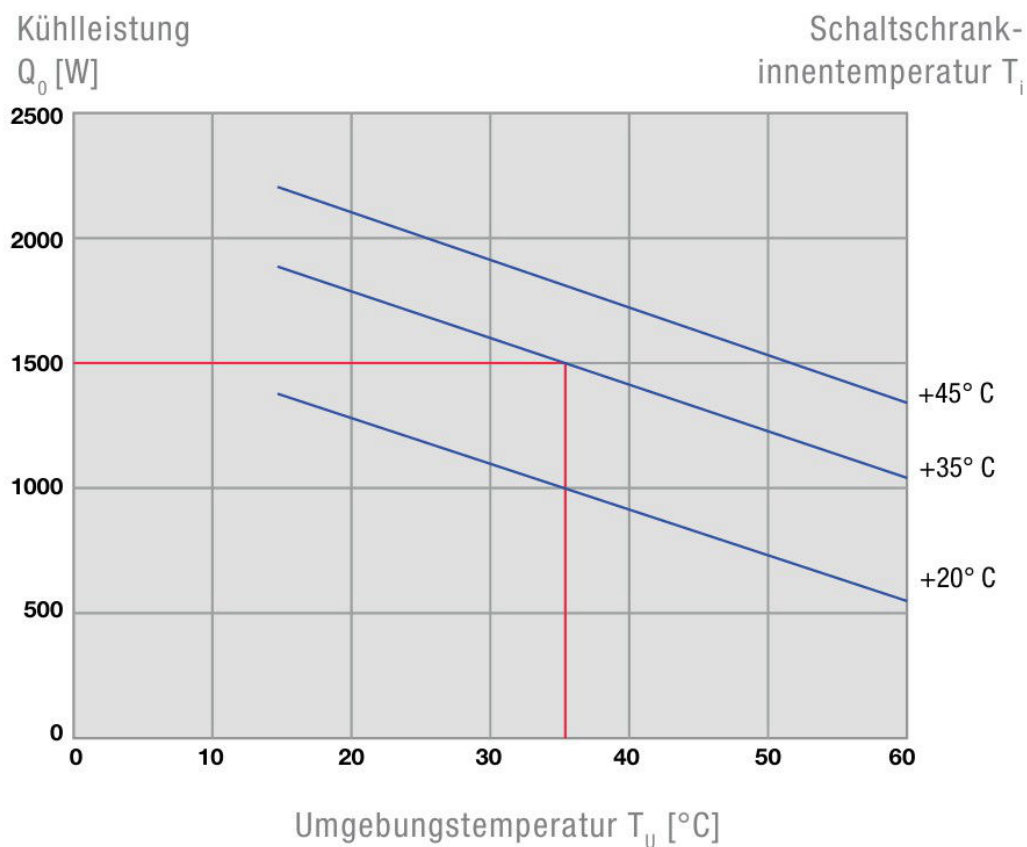

Dimensions and Cutout IUKTI6201A

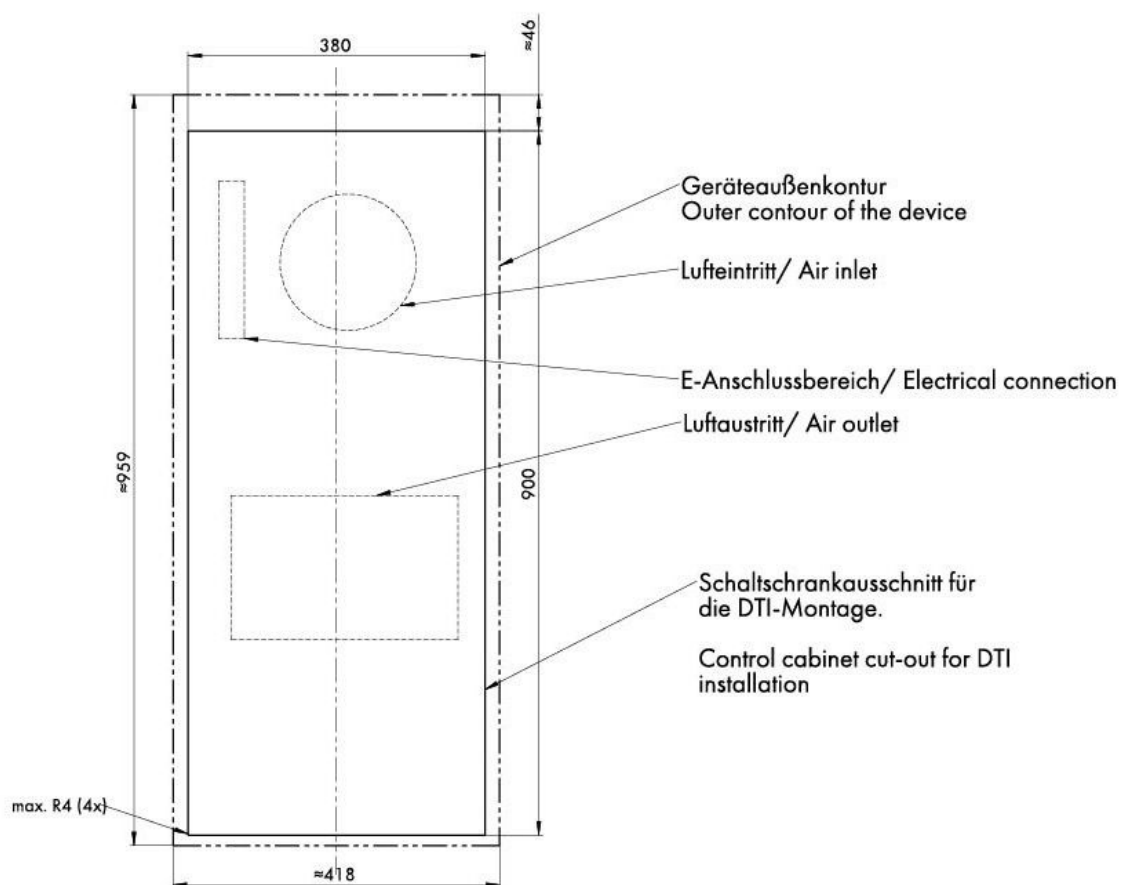

Descriere

Cod comandă

Unitate racire 1.5kW, montaj partial ingropat, seria DTI
400V, adancime sectiune ingropata = 72mm, IP 55, RAL 7035

IUKTI6301A