


Date tehnice pentru produs: LID15017--

Yero II 7W LED 550lm 3000K 35° 700mA IP20 dimabil negru

quick fix Ring must be ordered separately requires 700mA driver; 04 REC SPOTS ADJ LED

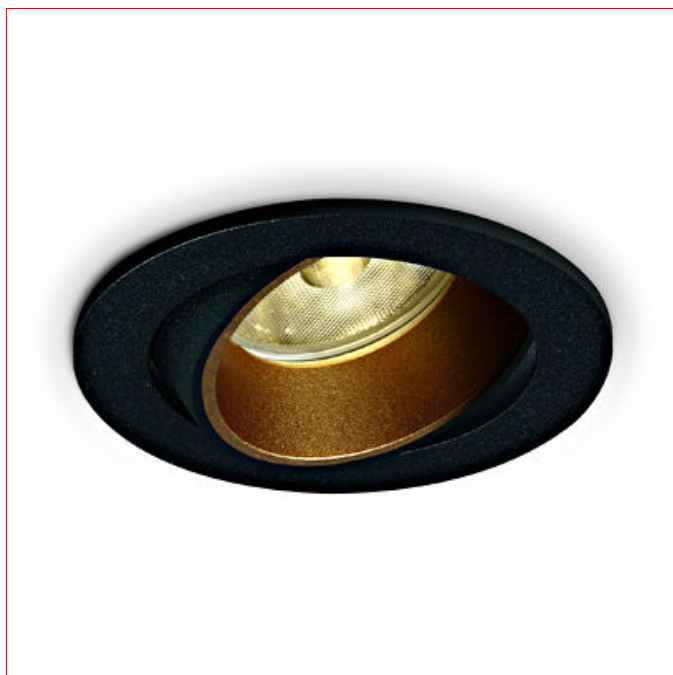

Detalii produs

6,5W COB LED adjustable recessed spot with interchangeable rings. Ring must be ordered separately. Requires 700mA driver. Complies with standard EN60598-1 and any other specific standards.


Fișe tehnice

Lumeni (lm)	550
Culoare lumină	alb cald
Temperatura culorii (K)	3000
Indice redare culoare	≥80
Dimabil	Depending on driver da
Clasă de protecție	III
grad de protecție	IP20
Tip iluminare	downlight
Surse de lumină incluse	da
Dulie lampă	LED Platine
Unghiul de radiație (°)	35
Eficiență sistem (lm/W)	84

Fișe tehnice - Continuare

Putere (W)	6,50
Balast	Needs to be ordered separately
Curent operational mA (mA)	700
Curent primar (A)	0,70
Montaj	Montaj încastrat în plafon
Decupaj mm (mm)	Ø 76
Adâncime montaj (mm)	100
Culoare	Negru
Material	aluminu
Diametru (mm)	85
Accesorii opționale	LID 16949--
Accesorii necesare	LID 15019--; LID 15022--; ; LID 15020--; LID 15018--; LID 15637--; LID 17390--
ØxH mm	85x73
DECUPAJ mm	Ø 76

Desen dimensional: Yero II 7W LED 550lm 3000K 35° 700mA IP20 dimabil negru

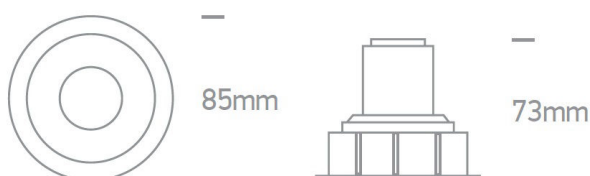

Tabel articole

Descriere	Cod comandă
Yero II 7W LED 550lm 3000K 35° 700mA IP20 dimabil negru quick fix Ring must be ordered separately requires 700mA driver; 04 REC SPOTS ADJ LED	LID15017
Accesorii necesare	
Reflector ptr.series Yero II negru 04 REC SPOTS ADJ LED	LID15019
Reflector ptr.series Yero II alama 04 REC SPOTS ADJ LED	LID15022
Reflector ptr.series Yero II copper 04 REC SPOTS ADJ LED	LID15020
Reflector ptr.series Yero II alb 04 REC SPOTS ADJ LED	LID15018
LED driver 4 - 8W 230V 700mA IP20 23 DRIVERS	LID15637
Driver LED 6-8W 700ma TRIAC Dimm IP20 230V 23 DRIVERS	LID17390
Accesorii opționale	
Conector rapid cu orificiu traversant 32A, 2x L-N-PE 26 ACCES&GADGETS	LID16949