

Date tehnice pentru produs: LID17891--

38120P IP65 1xT8 LED TUBE 600mm PC/PC


Delivery without LED Tube



Fișe tehnice

Culoare	Gri
Material	PC
Mască	PC opal
Tensiune de alimentare AC (V)	100-240
Tensiune intrare AC (V)	100-240
Număr lămpi	1
Clasă de protecție	II
grad de protecție	IP65
Rezistența la șoc	IK8

Desen dimensional: 38120P IP65 1xT8 LED TUBE 600mm PC/PC

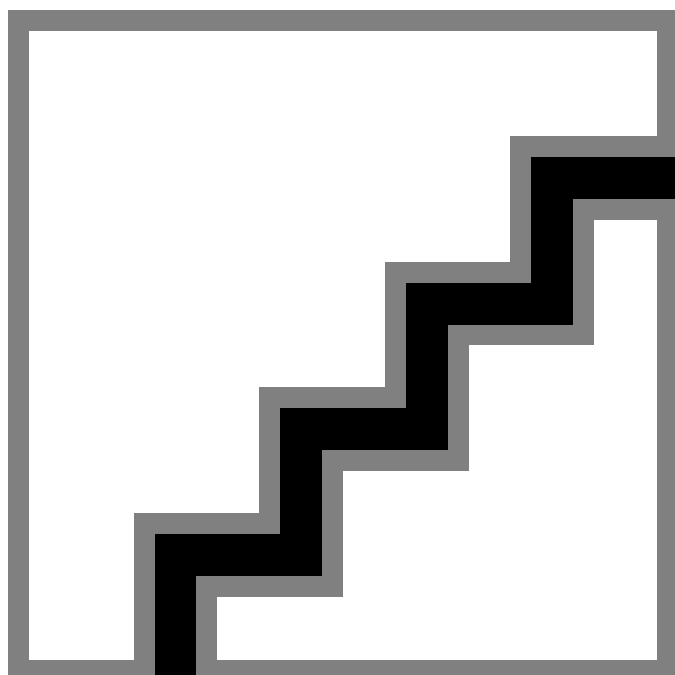

Tabel articole

Descriere	Cod comandă
38120P IP65 1xT8 LED TUBE 600mm PC/PC	LID17891
Delivery without LED Tube	
Accesorii opționale	
RL-LED T8 18S G13 EM 7,3W 840 1100lm L-600mm	LI43518307
T8 Retrofit lamp for CCG, replacement for 18W	
RL-T8 18 6,3W 840 800lm G13 190° mat EM 600mm	LI43919875
LED retrofit tube for operation with a magnetic ballast; including starter	
RL-T8 18 8W 865 800lm G13 190° mat HF 600mm	LI43920135
LED Retrofit Röhre with suitable ECG	
RL-T8 18 8W 840 800lm G13 190° mat HF 600mm	LI43920136
LED Retrofit Röhre with suitable ECG	
RL-T8 18 S 7,3W 865 1100lm G13 190° mat EM 600mm	LI43719721
LED retrofit tube for operation with a magnetic ballast; including starter	
RL-T8 18 S 7,3W 840 1100lm G13 190° mat EM 600mm	LI43719720
LED retrofit tube for operation with a magnetic ballast; including starter	
RL-T8 18 S 7,5W 830 1000lm G13 190° mat HF 600mm	LI43719731
LED Retrofit Röhre with suitable ECG	
RL-T8 18 SP 6,7W 840 1100lm G13 190° mat EM 600mm	LI43719790
LED retrofit tube for operation with a magnetic ballast	

Tabel articole

Descriere	Cod comandă
Accesorii opționale	
RL-T8 18 SP 6,7W 865 1100lm G13 190° mat EM 600mm LED retrofit tube for operation with a magnetic ballast	LI43719791
RL-T8 NEO 18 6,9W 840 18,5 - 20,5V G13 160° mat 600mm T8 LED tube for external LED driver, LIOTDA4030	LI43719848
RL-T8 NEO 18 6,9W 865 18,5 - 20,5V G13 160° mat 600mm T8 LED tube for external LED driver, LIOTDA4030	LI43719849
RL-T8 18 S 7,5W 840 1100lm G13 190° mat HF 600mm LED Retrofit Röhre with suitable ECG	LI43720058
RL-T8 18 6,3W 830 760lm G13 200° mat EM 600mm LED retrofit tube for operation with a magnetic ballast	LI43919882
RL-LED T8 18S G13 UN 7,5W 830 1000lm L-600mm LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG	LI43518415
RL-T8 18 S MS 6,8W 840 1100lm G13 190° mat EM 600mm LED retrofit tube for operation with a magnetic ballast	LI43719796