

Date tehnice pentru produs: LID17893--

38150P IP65 1xT8 LED TUBE 1500mm PC/PC


Delivery without LED Tube



Fișe tehnice

Culoare	Gri
Material	PC
Mască	PC opal
Tensiune de alimentare AC (V)	100-240
Tensiune intrare AC (V)	100-240
Număr lămpi	1
Clasă de protecție	II
grad de protecție	IP65
Rezistența la șoc	IK8

Desen dimensional: 38150P IP65 1xT8 LED TUBE 1500mm PC/PC

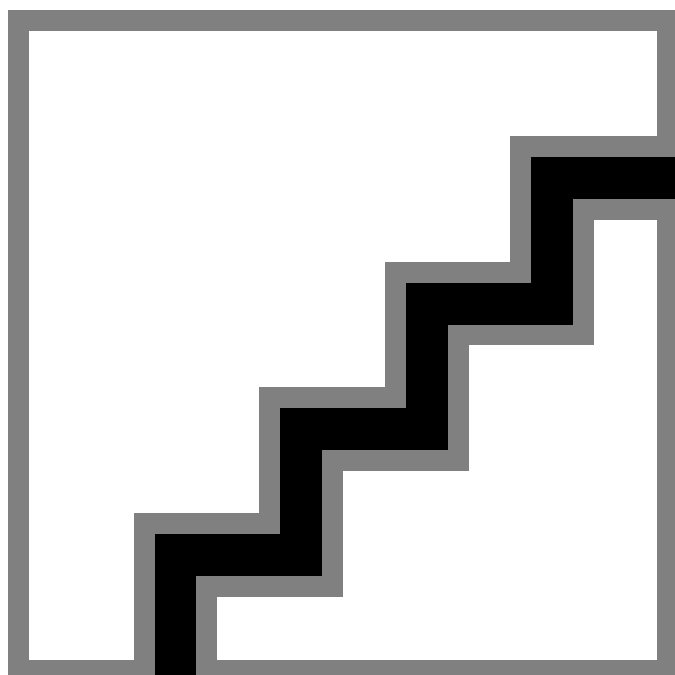

Tabel articole

Descriere	Cod comandă
38150P IP65 1xT8 LED TUBE 1500mm PC/PC	LID17893
Delivery without LED Tube	
Accesorii opționale	
RL-T8 58 18,3W 840 2200lm G13 190° mat EM 1500mm	LI43919879
LED retrofit tube for operation with a magnetic ballast; including starter	
RL-T8 58 24W 865 2800lm G13 190° mat UN 1500mm	LI43920132
LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG; including starter	
RL-T8 58 18,3W 865 2200lm G13 190° mat EM 1500mm	LI44020243
LED retrofit tube for operation with a magnetic ballast; including starter	
RL-T8 58 17,5W 830 1980lm G13 200° mat EM 1500mm	LI44119884
LED retrofit tube for operation with a magnetic ballast; including starter	
RL-T8 58 S 20,6W 840 3100lm G13 190° mat EM 1500mm	LI43719729
LED retrofit tube for operation with a magnetic ballast; including starter	
RL-T8 58 HO 23W 840 3700lm G13 190° mat UN 1500mm	LI43720052
LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG; including starter	
RL-T8 S 20W 840 3100lm G13 190° mat HF L=1500mm	LI43720060
LED Retrofit Röhre with suitable ECG	
RL-T8 58 S 20,6W 865 3100lm G13 190° mat EM 1500mm	LI43719730
LED retrofit tube for operation with a magnetic ballast; including starter	

Tabel articole

Descriere	Cod comandă
Accesorii opționale	
RL-T8 58 S 20W 830 2800lm G13 190° mat HF 1500mm LED Retrofit Röhre with suitable ECG	LI43719735
RL-T8 58 S 20W 865 3100lm G13 190° mat HF 1500mm LED Retrofit Röhre with suitable ECG	LI43719736
RL-T8 58 SP 18,8W 840 3100lm G13 190° mat EM 1500mm LED retrofit tube for operation with a magnetic ballast	LI43719794
RL-T8 58 HO 23W 865 3700lm G13 190° mat HF 1500mm LED Retrofit Röhre with suitable ECG	LI43920140
RL-T8 58 SP UO 23,4W 840 4100lm G13 190° mat EM 1500mm LED retrofit tube for operation with a magnetic ballast	LI43720048
RL-T8 58 S HO 23,1W 840 3700lm G13 190° mat EM 1500mm LED retrofit tube for operation with a magnetic ballast; including starter	LI43819788
RL-LED T8 58S G13 UN 20W 830 2800lm L-1500mm LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG	LI43518438
RL-LED T8 58S G13 UN 20W 865 3100lm L-1500mm LED retrofit tube for 230V direct connection, operation with a magnetic ballast or suitable ECG	LI43518441