

Date tehnice pentru produs: LIFS012003

Bandă flexibilă 60 NW, Ra=90+, 13,5W/m, 1090lm/m, 24VDC, I=5




Fișe tehnice

Power per Meter (W/m)	13,80
Flux luminos/m (lm/m)	1180
Culoare lumină	neutral white
Temperatura culorii (K)	4050K +/- 120
Indice redare culoare	≥90
Dimabil	Depending on driver da
Clasă de protecție	III
Grad de protecție	IP44
Tip iluminare	LED Strip
Surse de lumină incluse	da
Unghiul de radiație (°)	120
Tensiune de alimentare DC (V)	24
Montaj	Montaj de perete Montaj încastat în plafon
Lungime (mm)	5000
Lățime (mm)	10,50
Înălțime (mm)	3

Fișe tehnice - Continuare

Accesorii opționale	LIAP006001;LIAP006003;LIAP006002;LIAP006004;LIAP006005;LIAP001003;LIAP001008;LIAP001001;LIAP001005;LIAP001002;LIAP001006;LIAP001004;LIAP001007;LIAP005003;LIAP005001;LIAP003002;LIAP003004;LIAP003003;LIAP003001;LIAP003005;LIAP003100;LIAP003200;LIAP004001;LIAP002006;LIAP002001;LIAP002003;LIAP002002;LIAP002004;LIAP002005
Accesorii necesare	LILPV10027;LINT244100;LINT924100;LINT245100
LxBxH mm	5000x11x3
Binning	3-SDCM
Sursă iluminare	LED

Desen dimensional: Bandă flexibilă 60 NW, Ra=90+, 13,5W/m, 1090lm/m, 24VDC, I=5

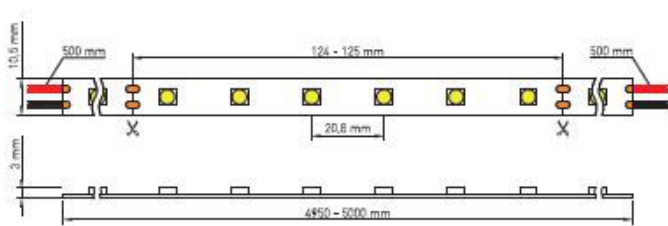

Tabel articole

Descriere	Cod comandă
Bandă flexibilă 60 NW, Ra=90+, 13,5W/m, 1090lm/m, 24VDC, l=5	LIFS012003
Accesorii necesare	
	LILPV10027
LED TD power supply 100W/24V DALI & Switch Dim Mono MM IP20	LINT244100
TALEXdriver Tridonic, dimmable 24 V constant voltage LED driver	
LED Power Supplies FW 100W/24V, MM, IP20	LINT924100
LED SN power supply 100W/24V IP20 long	LINT245100
Accesorii opționale	
Aluminium Profile CLF	LIAP006001
Aluminium Profile CLI	LIAP006003
Aluminium Profile CLR	LIAP006002
Aluminium Profile CLU	LIAP006004
Aluminium Profile CLW	LIAP006005
Profil aluminiu LBE, L-2000mm B-25mm H-25mm	LIAP001003
Aluminiu Profil LBE 30/60	LIAP001008
Profil aluminiu LBF, L=2000mm, W=19mm, H=8mm	LIAP001001
Profil aluminiu LBI, L-2000mm B-29mm H-19mm	LIAP001005
Profil aluminiu LBR, L-2000mm W-19mm H-19mm	LIAP001002
Profil aluminiu LBS, L=2000mm, Ø-29,9mm	LIAP001006
Profil aluminiu LBU, L-2000mm W-29mm H-8mm	LIAP001004
Profil aluminiu LBV, L-2000mm B-22mm H-65mm	LIAP001007
Aluminium Profile MFI	LIAP005003
Aluminium Profile MFR 2m	LIAP005001
Profil aluminiu SLA, L-2000mm B-60mm H-36mm	LIAP003002
Aluminiu Profil SLH	LIAP003004
Profil aluminiu SLI, L-2000mm B-60mm H-36mm	LIAP003003
Profil aluminiu SLR, L-2000mm B-60mm H-50mm	LIAP003001
Aluminiu Profil SLT	LIAP003005
Aluminium Profile SLW smooth	LIAP003100
Aluminium Profile SLW rippled	LIAP003200
Aluminium Profile SPL 2m	LIAP004001
Aluminiu Profil TBE 2m	LIAP002006
Profil aluminiu TBF L-2000mm W-25mm H-12,5mm	LIAP002001
Profil montaj TBI cu ramă, anodizat	LIAP002003
Profil aluminiu TBR	LIAP002002
Profil aluminiu TBU, L-2000mm B-25mm H-14,5mm	LIAP002004

Tabel articole

Descriere	Cod comandă
Accesorii opționale	
Profil aluminiu TBW, L-2000mm B-26,3mm H-80mm	LIAP002005