


Date tehnice pentru produs: LIG8100003

SIMPLE LINE LED 2012 64W 7100lm/830 ECG IP20 white

Freestanding light strip with connector



Curba distributie lumina




Fișe tehnice

Lungime (mm)	2.014,00
Lățime netă (mm)	40,00
Înălțime (mm)	60,00
Masă netă (kg.)	4,00
Temperatura maximă a mediului ambiant (°C)	45
Tip iluminare	pendulum luminaire downlight
Montaj	Pendul Montaj aparent
Culoare	alb

Fișe tehnice - Continuare

Material	plastic opal aluminiu
Fabricant	01-Schrack-Trinity
Balast	insert electronic EVG
Tensiune de alimentare AC (V)	220-240
Dulie lampă	LED Platine
Watt (W)	64
Eficiență sistem (lm/W)	111
Culoare lumină	alb cald
Temperatura culorii (K)	3000
Indice redare culoare	≥80
Lumeni (lm)	7100
Durată de viață	50.000h / L80 / B10
Dimabil	nu
Clasă de protecție	I
Grad de protecție	IP20
Rezistența la șoc	IK07
Surse de lumină incluse	da
LxBxH mm	2014x40x60

Desen dimensional: SIMPLE LINE LED 2012 64W 7100lm/830 ECG IP20 white

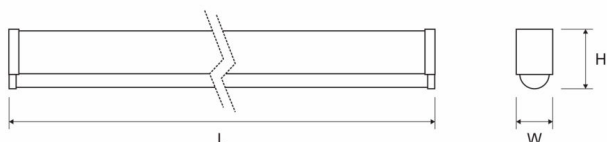

Tabel articole

Descriere	Cod comandă
SIMPLE LINE LED 2012 64W 7100lm/830 ECG IP20 white	LIG8100003
Freestanding light strip with connector	
Accesorii opționale	
SIMPLE LINE StarterKIT (3-pole)	LIG3100791
1x power connector, 2x end cap, 1x mounting bracket, 2x cover masking for reflector	
SIMPLE LINE aluminum reflector AS	LIG3000768
SIMPLE LINE double aluminum reflector AS	LIG3000769