




Date tehnice pentru produs: LILE0131--

Novia R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off black

Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 10W=1200lm / 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm. Articelnumber of the DALI-Module: LILE0136--



Curba distributie lumina




Fișe tehnice

Înălțime (mm)	79,00
Diametru (mm)	320,00
Masă netă (kg.)	2,45
Temperatura minimă a mediului ambiant (°C)	-10
Temperatura maximă a mediului ambiant (°C)	40
Montaj	Lampă de perete Montaj încadrat în plafon
Culoare	Negru RAL 9005
Material	PMMA aluminu
Indice de orbire (UGR)	19
Tensiune de alimentare AC (V)	220-240
Tensiune de alimentare DC (V)	216 260 240 186
Eficiență sistem (lm/W)	120
Putere (W)	24 18 10
Culoare lumină	alb cald neutral white
Temperatura culorii (K)	4000 3000
Indice redare culoare	90
Lumeni (lm)	1200 2880 2160
Durată de viață	50000
Clasă de protecție	I
grad de protecție	IP20
Clasă eficiență energetică	D
Rezistența la șoc	IK06

Fișe tehnice - Continuation

Diametru (mm)	320
ØxH mm	320x79

Desen dimensional: Nova R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off black

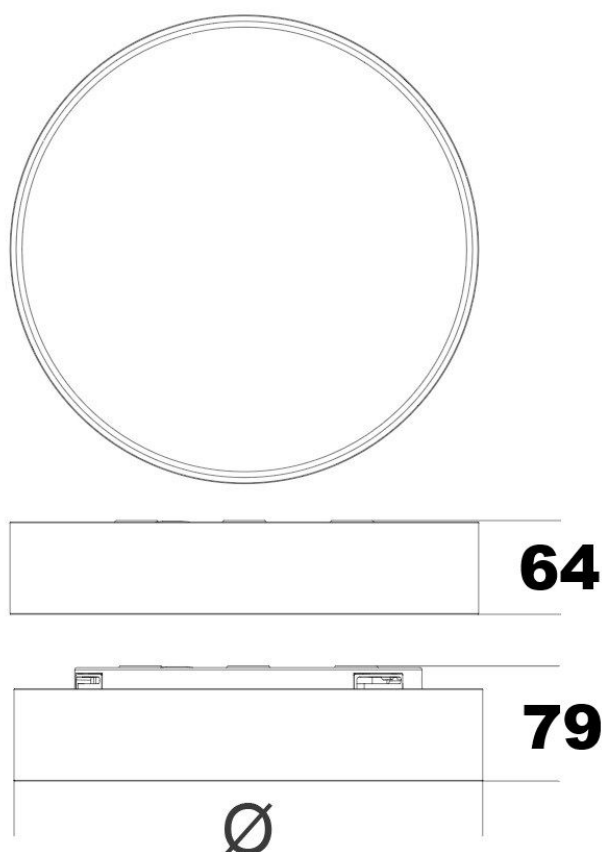

Descriere	Cod comandă
Nova R 320 10/18/24W 3000/4000K Ra90 UGR19 on/off black Wall and ceiling light direct/indirect, indirect component can be switched off, adjustable wattage and light color, 10W=1200lm / 18W=2160lm / 24W=2880lm@4000K, 120lm/W@4000K, Ø-320mm H=64/79mm. Articelnumber of the DALI-Module: LILE0136--	LILE0131