


Date tehnice pentru produs: LIUS0045--

MIROLUX 32W 3600-4000lm 2,7/3,2/4K CRI90 IP40/44 alb 1,2m

Opal cover, IP44 wall mounting, IP40 ceiling mounting



Curba distributie lumina

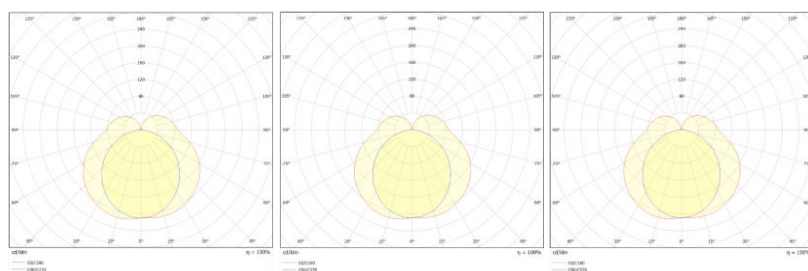


Detalii produs

"The MIROLUX mirror luminaire is a linear LED luminaire designed to provide uniform and low-glare illumination for mirror and washbasin areas. It is available in three lengths (0.6 m, 0.9 m, 1.2 m) and is suitable for residential and professional applications. The integrated LED technology delivers a high luminous efficacy of >120 lm/W. Three correlated colour temperatures are available (2700 K / 3200 K / 4000 K) with a CRI of 90, ensuring natural and accurate colour rendering. The luminaire supports multiple mounting options: Wall mounting: IP44, suitable for bathroom installations Ceiling and pendant mounting: IP40, for general lighting applications Power consumption depends on the luminaire length: 0.6 m: 12 W 0.9 m: 20 W 1.2 m: 32 W The housing is finished in white and features a clean, functional design. MIROLUX combines efficient LED technology, high light quality and flexible installation options."

Fișe tehnice

Lungime (mm)	1.200,00
Lățime netă (mm)	46,00
Înălțime (mm)	72,00
Lungime pendul (mm)	1,50
Masă netă (kg.)	1,60
Temperatura minimă a mediului ambiant (°C)	-20
Temperatura maximă a mediului ambiant (°C)	45
Tip iluminare	mirror light
Montaj	Montaj de perete Pendul Montaj încastrat în plafon
Culoare	Alb
Material	aluminu Polycarbonat
Mască	Polycarbonate
Unghiul de radiație (°)	110
Balast	LED driver
Tensiune de alimentare AC (V)	220-240
Curent operational mA (mA)	800
Dulie lampă	LED Platine
Eficiență sistem (lm/W)	112
Putere (W)	32
Culoare lumină	alb cold neutral white
Temperatura culorii (K)	2700 4000 3200
Indice redare culoare	90
Stabilitatea culorii MacAdam (sdcm)	<6
Lumeni (lm)	3600 4000
Durată de viață	50.000h
Dimabil	nu
Clasă de protecție	I
grad de protecție	IP44
Rezistența la șoc	IK06
Surse de lumină incluse	da
LxBxH mm	1200x46x72
Număr de corpuri de iluminat per MCB B10	10
Număr de corpuri de iluminat per MCB B16	16
Număr de corpuri de iluminat per MCB C10	17
Număr de corpuri de iluminat per MCB C16	27

Desen dimensional: MIROLUX 32W 3600-4000lm 2,7/3,2/4K CRI90 IP40/44 alb 1,2m

Descriere	Cod comandă
MIROLUX 32W 3600-4000lm 2,7/3,2/4K CRI90 IP40/44 alb 1,2m	LIUS0045
Opal cover, IP44 wall mounting, IP40 ceiling mounting	