


Date tehnice pentru produs: LIVB0023--

DEVO PRO II AIR 25/32/38/44W DIP Switch 840 PMMA opal IP66

LED moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips, additionally Dip-Switch function: 25W-4100lm/32W-5200lm/38W-6200lm/44W-7200lm



Curba distributie lumina



Detalii produs

Devo PRO II for outdoor use; climatic spigot (membrane to compensate for temperature differences); silicone seal; UV-resistant



Fișe tehnice

Lungime (mm)	1.454,00
--------------	----------


Fișe tehnice - Continuare

Lățime netă (mm)	102,00
Înălțime (mm)	90,00
Temperatura minimă a mediului ambiant (°C)	-20
Temperatura maximă a mediului ambiant (°C)	35
Tip iluminare	wall luminares pendulum luminaire downlight
Montaj	Montaj de perete Pendul Montaj încastat în plafon
Culoare	gri deschis
Material	Glass fibre reinforced polyester
Mască	PMMA opal
Balast	LED driver AC
Tensiune de alimentare AC (V)	230
Dulie lampă	LED Platine
Eficiență sistem (lm/W)	139
Putere (W)	25;32;38;44
Culoare lumină	neutral white
Temperatura culorii (K)	4000
Indice redare culoare	≥80
Lumeni (lm)	4100;5200;6200;7200
Durată de viață	50.000h / L80 / B10
Dimabil	nu
Clasă de protecție	I
Grad de protecție	IP66
Rezistența la șoc	IK03
Surse de lumină incluse	da
Fire protection marking	D
LxBxH mm	1454x102x90
Numbers of luminars per MCB B10	11
Numbers of luminars per MCB B16	16
Numbers of luminars per MCB C10	19
Numbers of luminars per MCB C16	27

Tabel de date: DEVO PRO II AIR 25/32/38/44W DIP Switch 840 PMMA opal IP66

DIP-Switch 1	DIP-Switch 2	Leistung [W]	Strom [mA]
OFF	OFF	25	200
OFF	ON	32	250
ON	OFF	38	300
ON	ON	44	350

Dimensions [mm]

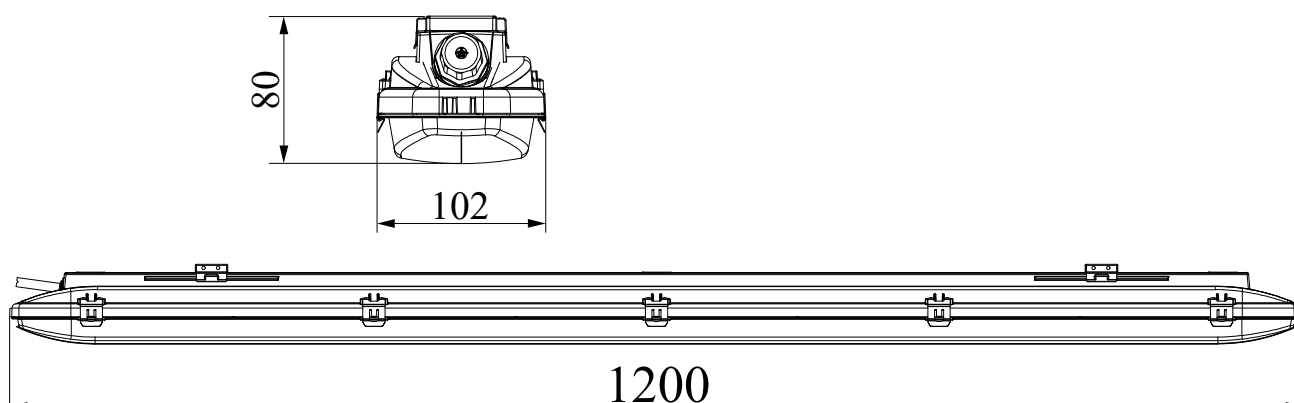

Descriere	Cod comandă
DEVO PRO II AIR 25/32/38/44W DIP Switch 840 PMMA opal IP66	
LED moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips, additionally Dip-Switch function:	LIVB0023
25W-4100lm/32W-5200lm/38W-6200lm/44W-7200lm	