

Date tehnice pentru produs: NLAMCCE03W

C. il. siguranță AM Control Whireless 3h LiFePO4 suspendat

Aspect oțel inoxidabil, 230 V AC/DC, distanță de vizualizare: 22 m, suspendare cablu, lungime standard 1500 mm, comutabil radio




Fișe tehnice

Lungime (mm)	241,00
Lățime netă (mm)	80,00
Înălțime (mm)	214,00
Masă netă (kg.)	1,15
Tip iluminare	semn (corp) iluminat siguranță
EB-ZB	Self contained luminaire
Funcție	control wire-less
Versiune	lampă iluminat marginală
Tip	AM
Culoare	aspectul oțelului inoxidabil
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Domeniu recunoaștere (m.)	22

Fișe tehnice - Continuare

Timp autonomie (h)	3
Sursă de lumină	LED (2W)
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,50
Power non-maintained mode (W)	0,80
Power max. (W)	4,70
Baterie (V/Ah)	2x3,2/1,2 LiFePO4
grad de protecție	IP40
Rezistență la impact	≥ IK03
Montaj	recessed ceiling mounting with cord
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	40
AA Clasa E 8101	AA4
Fabricant	Schrack

Dimensions (mm)

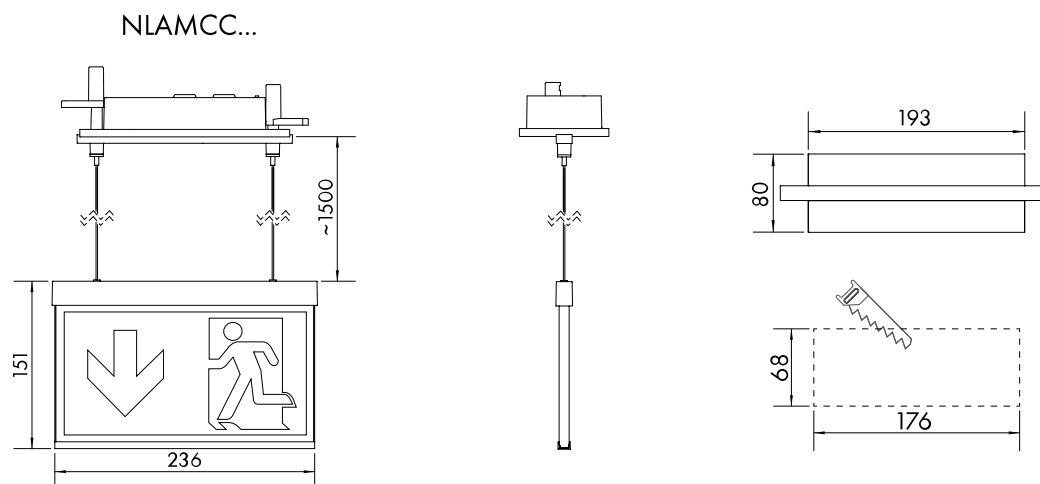

Descriere	Cod comandă
C. il. siguranță AM Control Whireless 3h LiFePO4 suspendat	
Aspect oțel inoxidabil, 230 V AC/DC, distanță de vizualizare: 22 m, suspendare cablu, lungime standard 1500 mm, comutabil radio	NLAMCCE03W

Tabel articole

Descriere	Cod comandă
Accesorii opționale	
Accesorii opționale	
Plug-pictogram stanga sus ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Pictogramă inserabilă stânga jos ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Pictogramă inserabilă dreapta sus ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Pictogramă inserabilă dreapta jos ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Pictograph set "fire protection" VD: 22 m. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Cutie incastrare beton ptr.C.il. Siguranta Design AM/AX	NLAMAXBE
Set 2 Accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO LiFePO4 - baterie litiu-fier fosfat , UN3480 - UN 3480 : baterii litiu-ion	NLAKKU321L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV