

Date tehnice pentru produs: NLAMWTA09E

C.il. Siguranta AM Duo antracit, LED, aplicat

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm




Fișe tehnice

Lungime (mm)	241,00
Lățime netă (mm)	50,00
Înălțime (mm)	151,00
Masă netă (kg.)	1,15
Tip iluminare	Combined rescue path and rescue sign luminaire
EB-ZB	Central power supply luminaire
Funcție	Cu monitorizare - comutație centralizată
Versiune	lampă iluminat marginală
Tip	AM
Culoare	RAL 7016 (antracit)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Domeniu recunoaștere (m.)	20
Sursă de lumină	LED (2W) ERT-LED (1W)

Fișe tehnice - Continuare

Lumen	140
Tensiunea de alimentare (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	3,10
Power non-maintained mode (W)	1,10
Power max. (W)	4,20
grad de protecție	IP40
Rezistență la impact	≥ IK03
Montaj	Montaj de perete
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	40
AA Clasa E 8101	AA4
Fabricant	Schrack

Dimensions (mm)

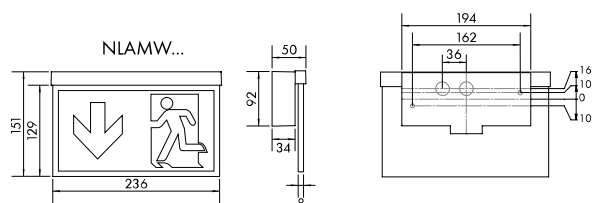

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	0,72	2,95	2,88	4,50	1,90
2,50	0,89	3,34	3,32	5,09	2,10
3,00	1,05	3,68	3,69	5,59	2,28
3,50	1,19	4,03	4,04	6,01	2,42
4,00	1,33	4,25	4,26	6,38	2,53
5,00	1,54	4,69	4,64	6,92	2,60
6,00	1,70	5,02	4,84	7,28	2,40
7,00	1,73	4,94	4,80	7,37	1,86
8,00	1,30	5,19	4,39	7,11	0,96

Tabel articole

Descriere	Cod comandă
C.il. Siguranta AM Duo antracit, LED, aplicat Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm	NLAMWTA09E
Accesorii opționale	
Plug-pictogram stanga sus ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Pictogramă inserabilă stânga jos ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Pictogramă inserabilă dreapta sus ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Pictogramă inserabilă dreapta jos ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Pictograph set "fire protection" VD: 22 m. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Adaptor PT ptr.C.il. Siguranta Design AM/AX anthracite, for lateral cable entry	NLAMAXAPAA