

Date tehnice pentru produs: NLILDF029E

C.il. Siguranta IL 1x3W ERT-LED 230V cai evacuare PT


White, surface ceiling mounting, Safety luminaire for lightning areas with luminaire distance 27m at a room height of 6m, with supervision - centrally switchable




Fișe tehnice

Înălțime (mm)	36,00
Diametru (mm)	99,00
Masă netă (kg.)	0,35
Tip iluminare	lampă de siguranță
EB-ZB	Central power supply luminaire
Funcție	Cu monitorizare - comutație centralizată
Versiune	corp iluminat din plastic
Tip	IL
Fără halogen	Housing made of halogen-free plastic
Culoare	Alb
Sursă de lumină	ERT-LED (3W)
Lumen	360
Tensiunea de alimentare (V)	230V AC 50Hz ±20%; 230V DC ±20%
grad de protecție	IP40
Montaj	Montaj încadrat în plafon
Temperatura minimă a mediului ambiant (°C)	-20
Temperatura maximă a mediului ambiant (°C)	40
AA Clasa E 8101	AA4
Fabricant	Schrack


Dimensions NLILD... (mm)

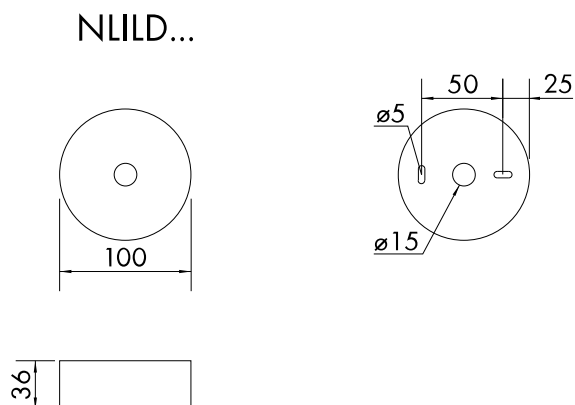

Dimensions accessoires NLILIP65 (mm)

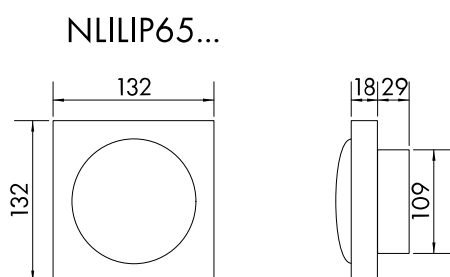

Dimensions accessoires Zinc die-dast housing NLEA.. (mm)

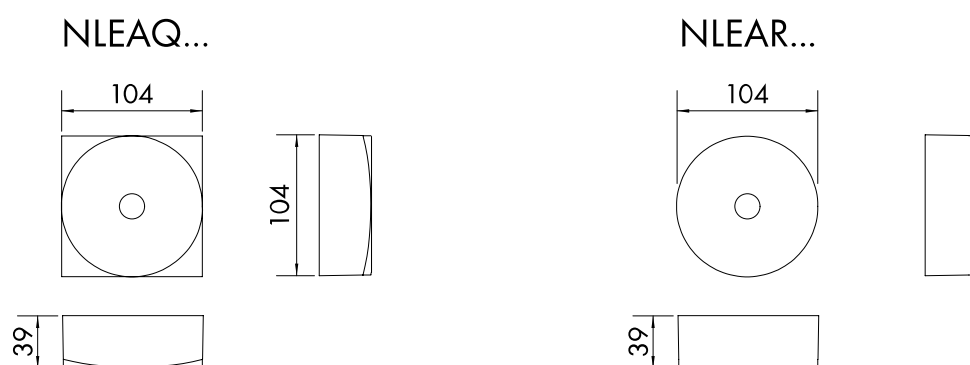

Dimensions recessed frame NLILDE (mm)



Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,30	6,19	12,64	19,15	8,02
2,50	2,41	6,52	14,11	21,89	9,33
3,00	2,43	6,80	15,42	24,37	9,81
3,50	2,45	7,00	16,34	26,62	10,16
4,00	2,31	7,09	16,66	28,11	9,42
6,00	1,28	6,40	13,14	27,10	5,04

Tabel articole

Descriere	Cod comandă
C.il. Siguranta IL 1x3W ERT-LED 230V cai evacuare PT	
White, surface ceiling mounting, Safety luminaire for lightning areas with luminaire distance 27m at a room height of 6m, with supervision - centrally switchable	NLILDF029E
Accesorii opționale	
Mufa patrata pentru carcasa B1 ptr. corp il. sig NLILD.	NLILB1
Mufă pătrată pentru carcasă B2 pt il sig NLILD.	NLILB2
Conector carcasa alb rotund zinc turnat	NLEAR
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Conector carcasa antracit rotund zinc turnat	NLEARAZ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Conector carcasa alb zinc turnat	NLEAQ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	

Tabel articole

Descriere	Cod comandă
Accesorii opționale	
Conector carcasa antracit patrat zinc turnat	NLEAQAZ
Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	
Placă distanțier albă pt NLILD. pt intrarea cablului lateral	NLILDAPA2
Ball Garnit.protect.ptr.IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3
Carcasa montatj aparent alb IP65 pt emerg. Lumin. NLILD	NLILIP65K
Policarbonat, cu intrări laterale pentru cabluri	
IP65 carcasa ptr.IL tavan mounted C.il., alb, IK10	
Suitable for surface-mounted emergency ceiling lights NLILD..., including spacer plate, vandal-proof with shock resistance test according to IK10, ball impact resistant according to DIN 18032	NLILIK10W