

Date tehnice pentru produs: NLILDS023W

C.il.sigIL 1x3W ERT-LED 3h 230VAC Wireless spot PT


White, surface ceiling mounting, Hi-bay radial beam for space illumination of high halls with luminaire distance 10,1m at mounting height 12m, central switching




Fișe tehnice

Înălțime (mm)	36,00
Diametru (mm)	99,00
Masă netă (kg.)	0,25
Tip iluminare	lampă de siguranță
EB-ZB	Self contained luminaire
Funcție	control wire-less
Versiune	corp iluminat din plastic
Tip	IL
Fără halogen	Housing made of halogen-free plastic
Culoare	Alb
Timp autonomie (h)	3
Sursă de lumină	ERT-LED (3W)
Lumen	240
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Baterie (V/Ah)	4,8/2,0 NiMh
grad de protecție	IP40
Montaj	Montaj încadrat în plafon
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	30
AA Clasa E 8101	AA4


Dimensions NLILD... (mm)

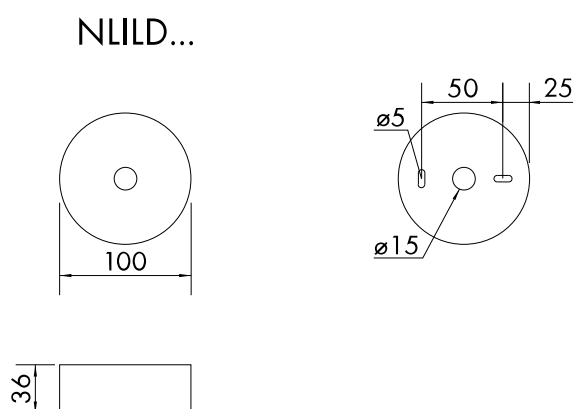

Dimensions accessoires NLILIP65 (mm)

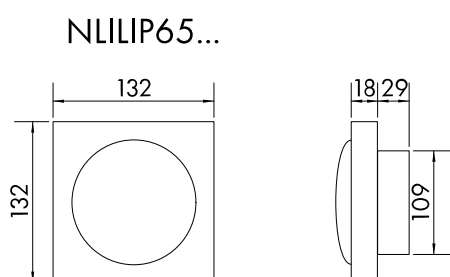

Dimensions accessoires Zinc die-dast housing NLEA.. (mm)

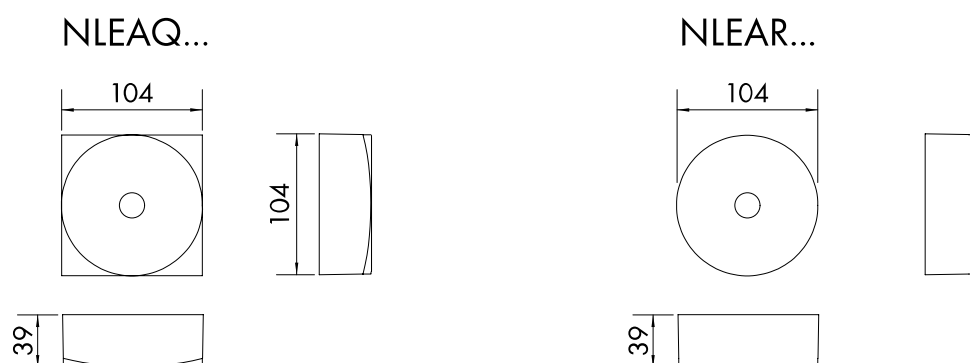

Dimensions recessed frame NLILDE (mm)



Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -3h autonomy time

Montagehöhe [m]					
2,00	2,22	5,34	5,38	5,41	2,30
2,50	2,50	6,28	6,33	6,38	2,59
3,00	2,80	6,81	6,87	6,92	2,80
3,50	2,94	7,28	7,35	7,42	3,04
4,00	3,13	7,72	7,79	7,86	3,13
5,00	3,38	8,64	8,58	8,52	3,38
6,00	3,60	9,34	9,26	9,18	3,46
7,00	3,72	9,86	9,74	9,64	3,56
8,00	3,56	10,30	10,16	10,02	3,40
9,00	3,27	10,53	10,38	10,20	3,27
10,00	3,04	10,6	10,44	10,28	2,88
12,00	2,13	10,11	9,93	9,75	1,89

Tabel articole

Descriere	Cod comandă
C.il.sigIL1x3W ERT-LED 3h 230VAC Wireless spot PT	
White, surface ceiling mounting, Hi-bay radial beam for space illumination of high halls with luminaire distance 10,1m at mounting height 12m, central switching	NLILDS023W
Accesorii opționale	
Mufa patrata pentru carcasa B1 ptr. corp il. sig NLILD.	NLILB1
Mufă pătrată pentru carcasă B2 pt il sig NLILD.	NLILB2

Tabel articole

Descriere	Cod comandă
Accesorii opționale	
Conector carcasa alb rotund zinc turnat Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAR
Conector carcasa antracit rotund zinc turnat Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEARAZ
Conector carcasa alb zinc turnat Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQ
Conector carcasa antracit patrat zinc turnat Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQAZ
Placă distanțier albă pt NLILD. pt intrarea cablului lateral	NLILDAPA2
Ball Garnit.protect.ptr.IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3
Carcasa montatj aparent alb IP65 pt emerg. Lumin. NLILD Policarbonat, cu intrări laterale pentru cabluri	NLILIP65K
Acumulator 4,8V 2,0Ah pentru C.IL. cu LED, LPU	NLAKKU4820
IP65 carcasa ptr.IL tavan mounted C.il., antracit Suitable for surface-mounted emergency ceiling lights NLILD..., including spacer plate, vandal-proof with shock resistance test according to IK10, ball impact resistant according to DIN 18032	NLILIK10A