

Date tehnice pentru produs: NLKBUC03SC

Self-cont. C.il KB autotest LED 3h 230V AC perete

IP65, temp. range -30° up to 40°C, 6 x HP LED 0,5W, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 1h: 300lm; 3h: 300lm; 8h: 160lm




Fișe tehnice

Lungime (mm)	326,00
Lățime netă (mm)	50,00
Înălțime (mm)	50,00
Masă netă (kg.)	1,01
Tip iluminare	modular safety luminaire
EB-ZB	Self contained luminaire
Funcție	Autocontrol temperatură joasă
Versiune	corp iluminat din plastic lampă iluminat marginală
Tip	KB
Fără halogen	Housing made of halogen-free plastic
Culoare	Alb
Timp autonomie (h)	3
Sursă de lumină	LED (3W)
Lumen	1h:300 3h:300 8h:160
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Power maintained mode (W)	4,50



Fișe tehnice - Continuare

Power non-maintained mode (W)	0,35
Power max. (W)	6,10
Baterie (V/Ah)	9,6/2,0 NiMh
grad de protecție	IP65
Rezistență la impact	IK05
Montaj	Montaj de perete recessed mounting ceiling optional Montaj încadrat în plafon universal
Temperatura minimă a mediului ambiant (°C)	-30
Temperatura maximă a mediului ambiant (°C)	40
AA Clasa E 8101	AA3 AA4 AA5
Fabricant	Schrack

Dimensions (mm)

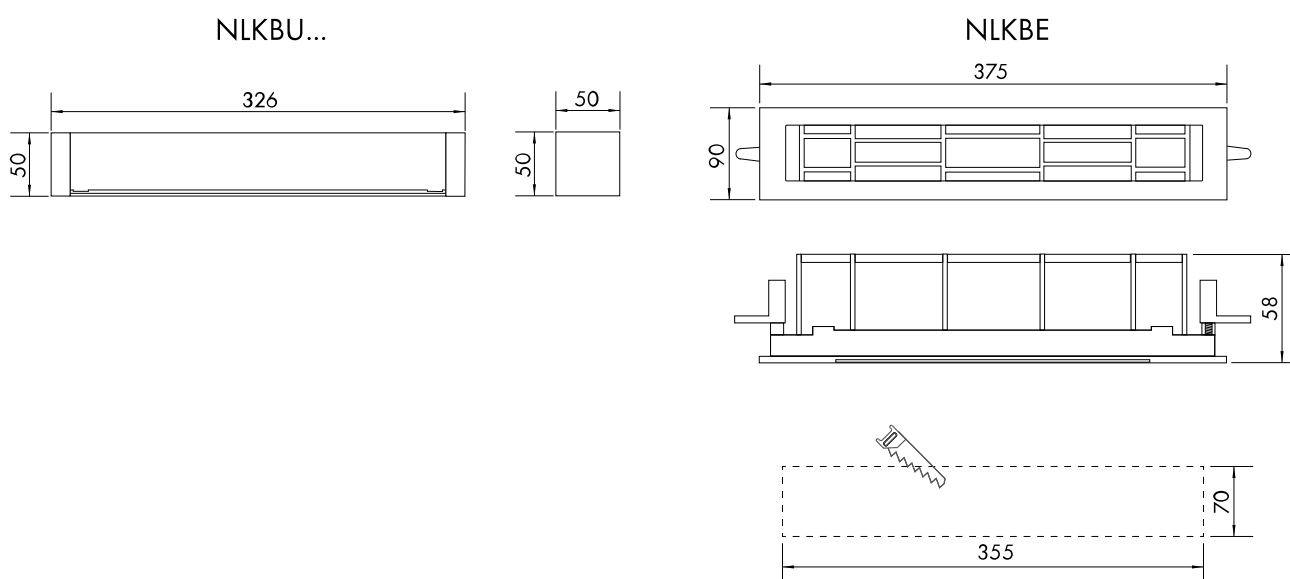


Drilling distances (mm)

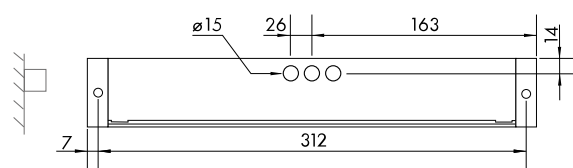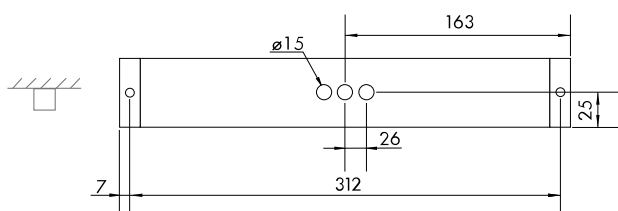


Dimensions (mm) optional pictogram edges


NLKBG

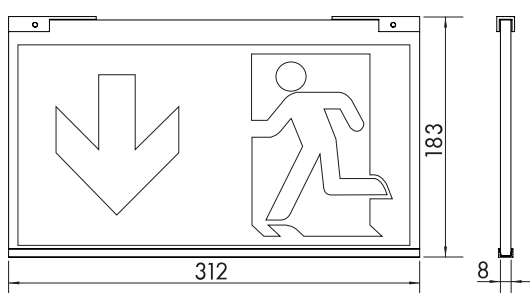


NLKBM

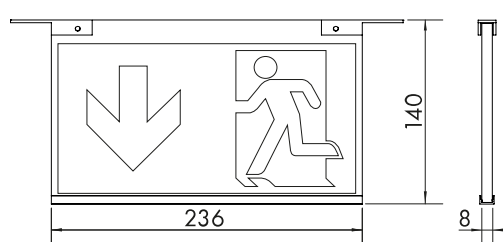

NLKBK

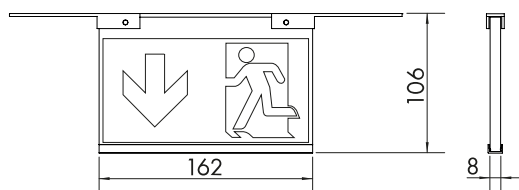

Dimensions (mm)

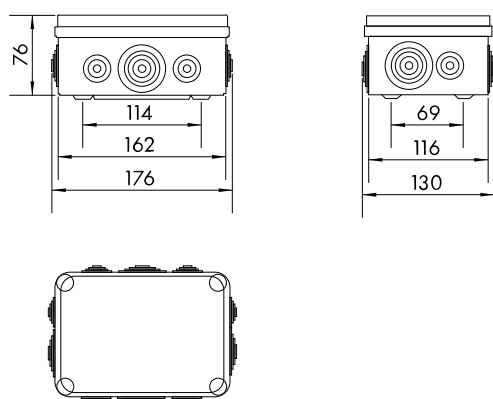

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	3,36	8,33	8,22	8,13	3,35
2,50	3,64	9,15	9,09	9,04	3,66
3,00	3,86	9,78	9,78	9,78	3,86
3,50	4,01	10,32	10,35	10,37	3,97
4,00	4,08	10,77	10,79	10,81	4,02
5,00	4,07	11,41	11,36	11,30	3,92
6,00	3,82	11,65	11,54	11,42	3,53
7,00	3,18	11,60	11,38	11,14	2,87
8,00	1,92	11,25	10,85	10,48	1,79

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	2,72	6,87	6,85	6,84	2,73
2,50	2,89	7,45	7,47	7,48	2,87
3,00	2,97	7,90	7,91	7,92	2,92
3,50	2,96	8,23	8,21	8,18	2,87
4,00	2,89	8,42	8,36	8,30	2,74
5,00	2,38	8,45	8,32	8,16	2,16
6,00	0,96	8,06	7,78	7,50	0,93

Tabel articole

Descriere	Cod comandă
Self-cont. C.il KB autotest LED 3h 230V AC perete IP65, temp. range -30° up to 40°C, 6 x HP LED 0,5W, batteries and electronics in external IP54 housing (176 x 130 x 76mm) to be mounted outside the cold area, modular version with optionally available pictogram panels with viewing distance 14m, 22m, 30m, 1h: 300lm; 3h: 300lm; 8h: 160lm	NLKBUC03SC
Accesorii opționale	
rama ptr.C.I.L. 4 KB EW: 22m	NLKBM
Ramă corp iluminat siguranță KB inclusiv 4 pictograme 30m	NLKBG
rama lumina de urgenta, inclusiv 4 KB pictograme EW: 14m	NLKBK
Protecție umiditate Corp iluminat siguranță KB plexiglas	NLKBBD
Caseta pentru corp iluminat de urgentadesign KB	NLKBCE
Caseta pentru corp iluminat de urgenta KB	NLKBCE
consola paralela pentru KB	NLAWW008
Akku 9,6V 2,0 Ah ptr.Einzelbatt. luminien ERT-LED 1h, 3h, 8h	NLAKKU9620
Pendul , argintiu, precablat	NL2DS

Tabel articole

Descriere	Cod comandă
Accesorii opționale	
Pendul, alb, precablat	NL2DW
pendul pereche, alb, 500mm precablat	NL2PW
Brat perete alb ptr. KB, KX, KW, KCD, KE, GX, RX	NLAWX001
cablu de suspensie	NLDSA000
Suspensie cablu 2000mm, 1 pereche	NLCORD2
Suspensie cablu 4000mm, 1 pereche	NLCORD4