

Date tehnice pentru produs: NLKMBS509C

Emergency luminaire KMB 4x0,5W LED CC24 24V, black

Universal mounting, with supervision - centrally switchable, 220lm



Fișe tehnice


Lungime (mm)	250,00
Lățime netă (mm)	34,00
Înălțime (mm)	50,00
Masă netă (kg.)	0,30
Tip iluminare	lampă de siguranță
EB-ZB	Central power supply luminaire
Funcție	24V Core24 with supervision- centrally switchable
Versiune	corp iluminat din plastic
Tip	KMB
Fără halogen	Housing made of halogen-free plastic
Culoare	RAL 9005 (negru)
Sursă de lumină	LED (2W)
Lumen	220
Tensiunea de alimentare (V)	24V AC

Fișe tehnice - Continuare


Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,40
Power max. (W)	2,10
grad de protecție	IP54
Rezistență la impact	≥ IK03
Montaj	Montaj de perete recessed mounting ceiling optional Montaj încastrat în plafon universal
Temperatura minimă a mediului ambiant (°C)	-30
Temperatura maximă a mediului ambiant (°C)	40
AA Class E 8101	AA3 AA4 AA5
Fabricant	Schrack

Abmessungen (mm)

NLKMB...

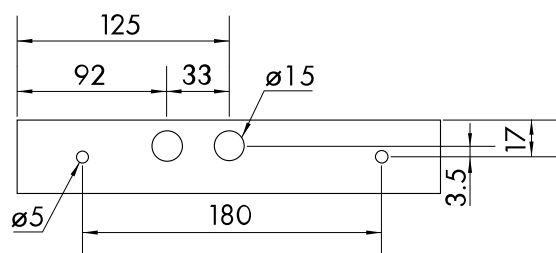

NLKME

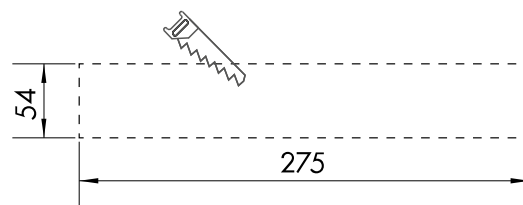

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	1,71	4,49	7,65	10,87	4,60
2,50	1,67	4,87	8,54	12,31	5,17
3,00	1,71	4,89	9,23	13,57	5,65
3,50	1,69	4,74	9,68	14,68	6,08
4,00	1,65	4,84	10,20	15,69	6,28
5,00	1,32	4,77	7,59	14,68	3,10

Tabel articole

Descriere	Cod comandă
Emergency luminaire KMB 4x0,5W LED CC24 24V, black Universal mounting, with supervision - centrally switchable, 220lm	NLKMB509C
Accesorii opționale	
Cadru încastrat negru pt corpuri de il. CPS Design KM,KMB,KS Required ceiling cut out: 275 x 54 mm	NLKMES
Cutie incastrare beton f. C.il. Siguranta Design KMB,KS,KM	NLKMBE
Brat perete alb ptr.C.il. Design KM/KS	NLAWKSU
Design pair of pendants 500 mm alb, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
cablu de suspensie	NLDSA000
Suspensie cablu 2000mm, 1 pereche	NLCORD2
Suspensie cablu 4000mm, 1 pereche	NLCORD4