

Date tehnice pentru produs: NLKMU003WL

C.il. Siguranta KM Wireless LED 3h 230VAC, comutabil

White, Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, viewing distance: 24m, 170lm, WirelessControl Professional type





Fișe tehnice

Lungime (mm)	250,00
Lățime netă (mm)	34,00
Înălțime (mm)	174,00
Masă netă (kg.)	0,60
Tip iluminare	semn (corp) iluminat siguranță
EB-ZB	Self contained luminaire
Funcție	control wire-less
Versiune	corp iluminat din plastic
Tip	KM
Fără halogen	Housing made of halogen-free plastic
Culoare	RAL 9003 (alb)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Domeniu recunoaștere (m.)	24
Țimp autonomie (h)	3
Sursă de lumină	LED (2W)
Lumen	170
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30



Fișe tehnice - Continuare

Baterie (V/Ah)	3,2/3,0 LiFePO4
grad de protecție	IP54
Rezistență la impact	IK03
Montaj	Montaj de perete recessed mounting ceiling optional Montaj încadrat în plafon universal
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	40
AA Clasa E 8101	AA4
Fabricant	Schrack

Dimensions (mm)

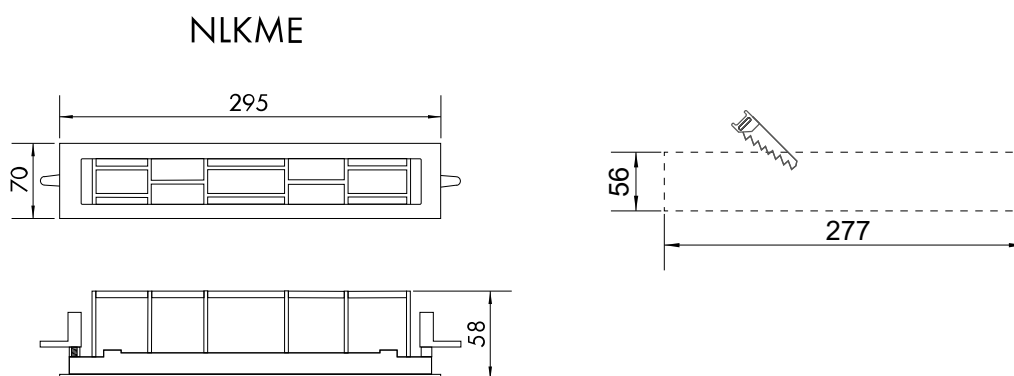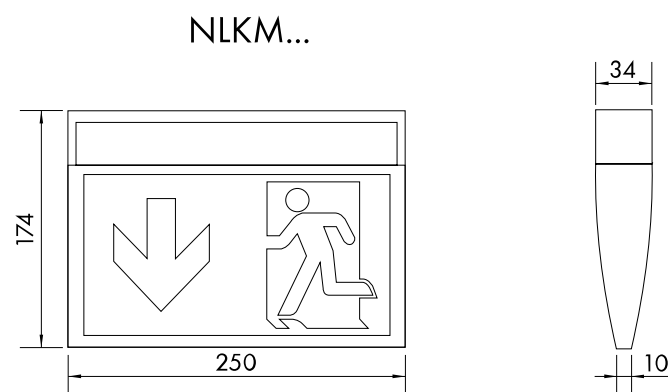

Drilling distances (mm)

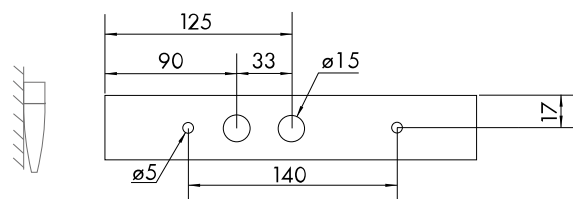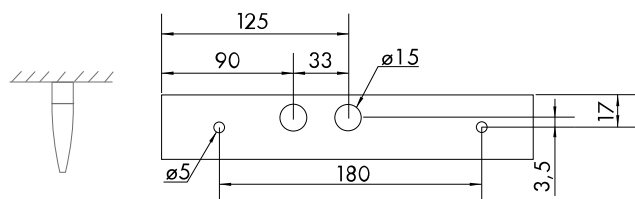

Tabel articole

Descriere	Cod comandă
C.il. Siguranta KM Wireless LED 3h 230VAC, comutabil White, Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, viewing distance: 24m, 170lm, WirelessControl Professional type	NLKMU003WL
Accesorii opționale	
Rama pt. corp iluminat Corp iluminat siguranță KM	NLKME
Brat perete alb ptr.C.il. Design KM/KS	NLAWKSU
Accu 3,2V 3,0Ah LiFePO4 ptr.LED C.il KM,KSC,KMB,ASM,ZAW For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230
Design pair of pendants 500 mm alb, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWMKS
Protectia cos pentru KD, KM, KS, LM, VM, RI, RM	NLBALL1
cablu de suspensie	NLDSA000
Suspensie cablu 2000mm, 1 pereche	NLCORD2
Suspensie cablu 4000mm, 1 pereche	NLCORD4