

Date tehnice pentru produs: NLKMU408WB

Emergency luminaire KM WirelessConnect LED 8h 230V AC, white

White, Universal mounting, with LiFePO₄ battery, exit sign luminaire, with Bluetooth communication.



Fișe tehnice


Lungime (mm)	250,00
Lățime netă (mm)	34,00
Înălțime (mm)	174,00
Masă netă (kg.)	0,60
Tip iluminare	semn (corp) iluminat siguranță
EB-ZB	Self contained luminaire
Funcție	Conexiune Wireless
Versiune	corp iluminat din plastic
Tip	KM
Fără halogen	Housing made of halogen-free plastic
Culoare	RAL 9003 (alb)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Fișe tehnice - Continuare


Domeniu recunoaștere (m.)	24
Timp autonomie (h)	8
Sursă de lumină	LED (2W)
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	4,60
Baterie (V/Ah)	3,2/3,3 LiFePO4
grad de protecție	IP40
Rezistentă la impact	IK03
Montaj	Montaj de perete recessed mounting ceiling optional Montaj încastrat în plafon universal
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	40
AA Clasa E 8101	AA4
Fabricant	Schrack

Desen dimensional: Emergency luminaire KM WirelessConnect LED 8h 230V AC, white


NLKM...

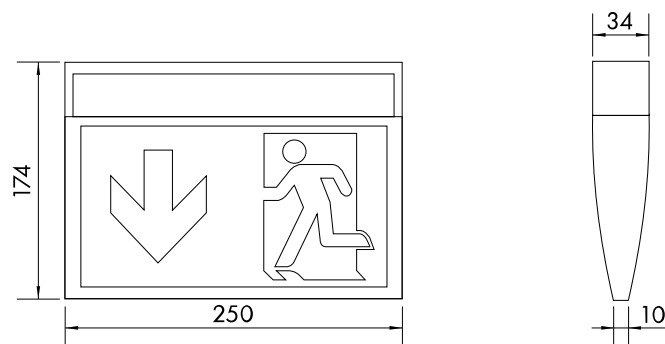

NLKME

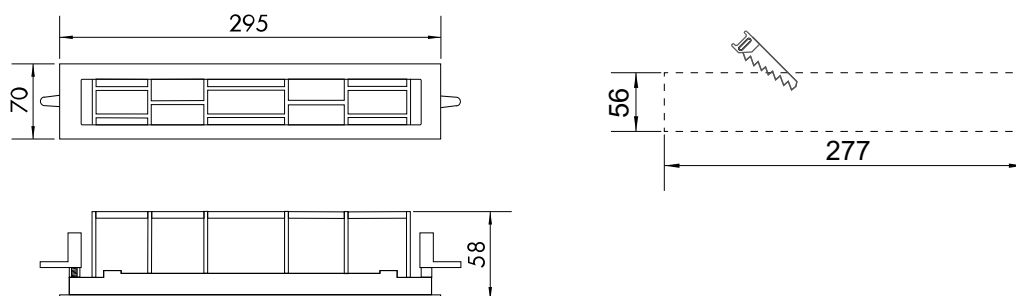

Desen dimensional: Emergency luminaire KM WirelessConnect LED 8h 230V AC, white

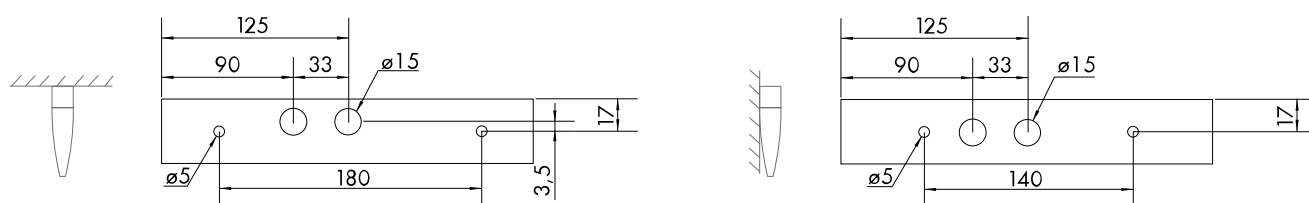

Tabel articole

Descriere	Cod comandă
Emergency luminaire KM WirelessConnect LED 8h 230V AC, white White, Universal mounting, with LiFePO4 battery, exit sign luminaire, with Bluetooth communication.	NLKMU408WB
Accesorii opționale	
Rama pt. corp iluminat Corp iluminat siguranță KM	NLKME
Brat perete alb ptr.C.il. Design KM/KS	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Design pair of pendants 500 mm alb, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Protectia cos pentru KD, KM, KS, LM, VM, RI, RM	NLBALL1
cablu de suspensie	NLDSA000
Suspensie cablu 2000mm, 1 pereche	NLCORD2
Suspensie cablu 4000mm, 1 pereche	NLCORD4