

Date tehnice pentru produs: NLKSCS403S

Emergency luminaire KS Autotest LED 3h 230V AC, black

Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h/8h adjustable, with transparent cover for additional light of the rescue path, viewing distance: 22m, 1h: 190lm; 3h: 190lm; 8h: 85lm



Fise tehnice



Lungime (mm)	250,00
Lățime netă (mm)	34,00
Înălțime (mm)	174,00
Masă netă (kg.)	0,60
Tip iluminare	Combined rescue path and rescue sign luminaire semn (corp) iluminat siguranță lampă de siguranță
EB-ZB	Self contained luminaire
Funcție	autocontrol
Versiune	corp iluminat din plastic lampă iluminat marginală
Tip	KS

Fișe tehnice - Continuare




Fără halogen	Housing made of halogen-free plastic
Culoare	RAL 9005 (negru)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Domeniu recunoaștere (m.)	22
Timp autonomie (h)	3
Sursă de lumină	LED (2W)
Lumen	1h: 190;3h: 190;8h: 85
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Baterie (V/Ah)	3,2/3,0 LiFePO4
grad de protecție	IP54
Rezistentă la impact	≥ IK03
Montaj	Montaj de perete recessed mounting ceiling optional Montaj încastrat în plafon universal
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	40
AA Clasa E 8101	AA4
Fabricant	Schrack

Abmessungen (mm)



NLKS...

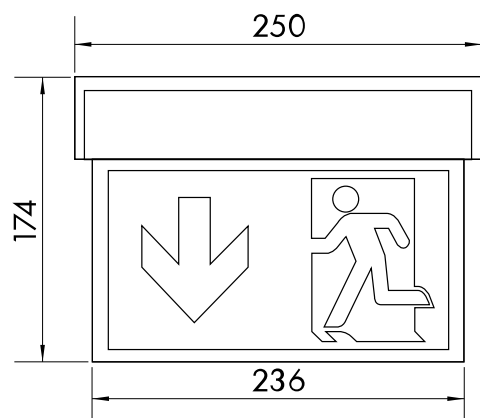

NLKME

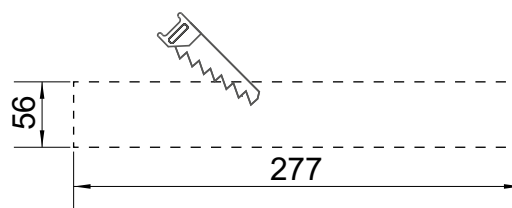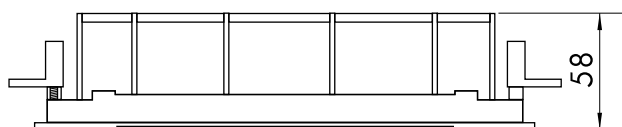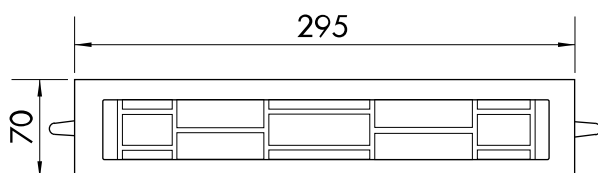

Bohrabstände (mm)

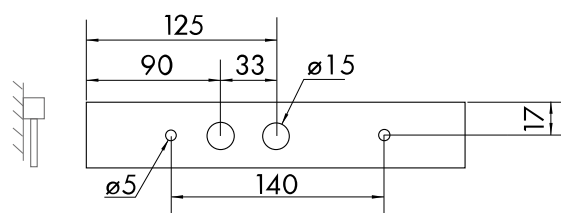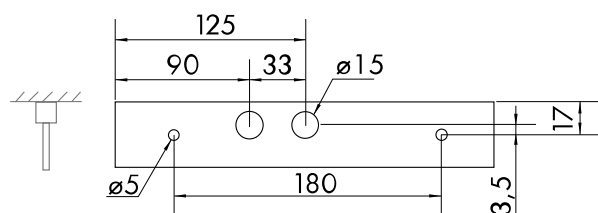

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	0,77	4,32	4,12	5,19	1,97
2,50	0,78	2,26	3,92	5,63	1,79
3,00	0,73	2,15	3,59	5,32	1,37
3,50	0,57	2,21	3,16	5,06	0,51

Tabel articole

Descriere	Cod comandă
Emergency luminaire KS Autotest LED 3h 230V AC, black Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h/8h adjustable, with transparent cover for additional light of the rescue path, viewing distance: 22m, 1h: 190lm; 3h: 190lm; 8h: 85lm	NLKSCS403S
Accesorii opționale	
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Plug-pictogram stanga sus ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Pictogramă inserabilă stânga jos ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Pictogramă inserabilă dreapta sus ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Pictogramă inserabilă dreapta jos ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Pictograph set "fire protection" VD: 22 m. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE

Tabel articole

Descriere	Cod comandă
Accesorii opționale	
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Brat perete alb ptr.C.il. Design KM/KS	NLAWKSU
Design pair of pendants 500 mm alb, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Protectia cos pentru KD, KM, KS, LM, VM, RI, RM	NLBALL1
cablu de suspensie	NLDSA000
Suspensie cablu 2000mm, 1 pereche	NLCORD2
Suspensie cablu 4000mm, 1 pereche	NLCORD4