

Date tehnice pentru produs: NLKSW003SC

C.I.L. EMERGENTA KS LED/3h 230V AC Wsim.





Fișe tehnice




Lungime (mm)	250,00
Lățime netă (mm)	34,00
Înălțime (mm)	174,00
Masă netă (kg.)	0,60
Tip iluminare	semn (corp) iluminat siguranță
EB-ZB	Self contained luminaire
Funcție	autocontrol
Versiune	lampă iluminat marginală
Tip	KS
Fără halogen	Housing made of halogen-free plastic
Culoare	Alb
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Domeniu recunoaștere (m.)	24
Țimp autonomie (h)	3
Sursă de lumină	LED (2W)
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Baterie (V/Ah)	4,8/0,5 NiMh
grad de protecție	IP54
Montaj	Montaj de perete Montaj încastat în plafon universal
AA Clasa E 8101	AA4
Fabricant	Schrack

Dimensions (mm)



NLKS...

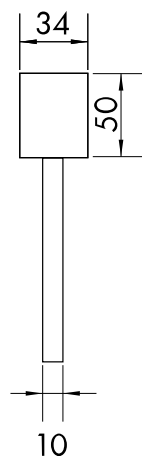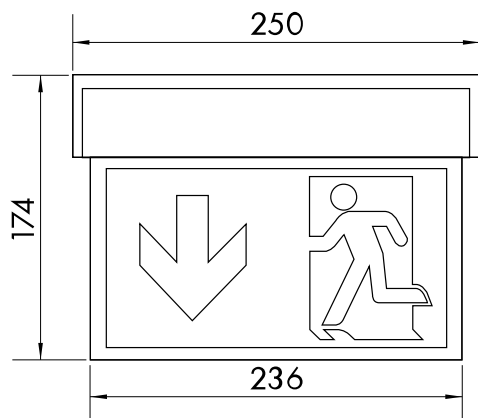

NLKME

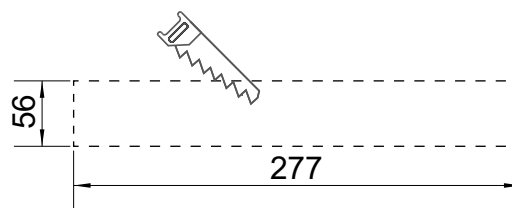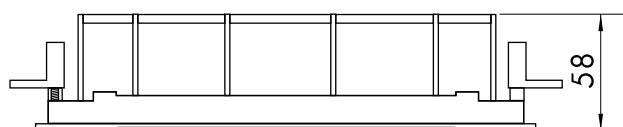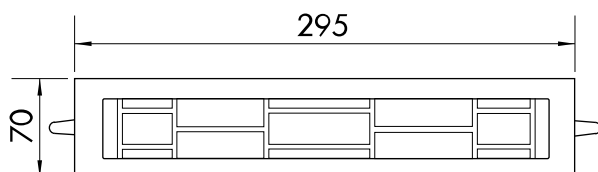

Drilling distances (mm)

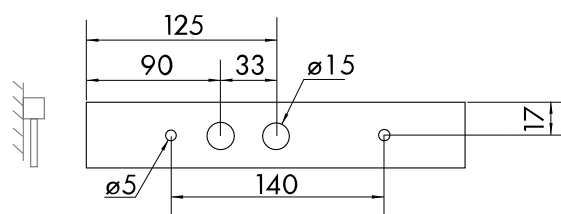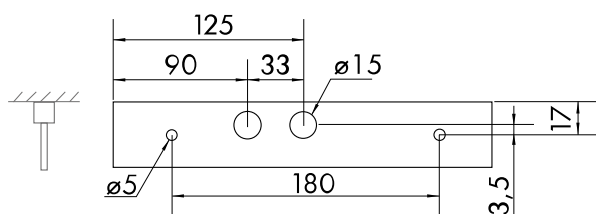

Tabel articole

Descriere	Cod comandă
C.I.L. EMERGENTA KS LED/3h 230V AC Wsim.	NLKS003SC
Accesorii opționale	
Acumulator 4,8V 0,5Ah pentru C.I.L. auto cont. cu LED KM, KS	NLAKKU4805
Plug-pictogram stanga sus ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Pictogramă inserabilă stânga jos ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Pictogramă inserabilă dreapta sus ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Pictogramă inserabilă dreapta jos ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Pictograph set "fire protection" VD: 22 m. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Brat perete alb ptr.C.il. Design KM/KS	NLAWKSU
Design pair of pendants 500 mm alb, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Protectia cos pentru KD, KM, KS, LM, VM, RI, RM	NLBALL1
cablu de suspensie	NLDSA000
Suspensie cablu 2000mm, 1 pereche	NLCORD2
Suspensie cablu 4000mm, 1 pereche	NLCORD4