


Date tehnice pentru produs: NLKWD039EL

C.il. Siguranta KW 4x1W ERT-LED 230V, montaj tavan

with supervision - centrally switchable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m

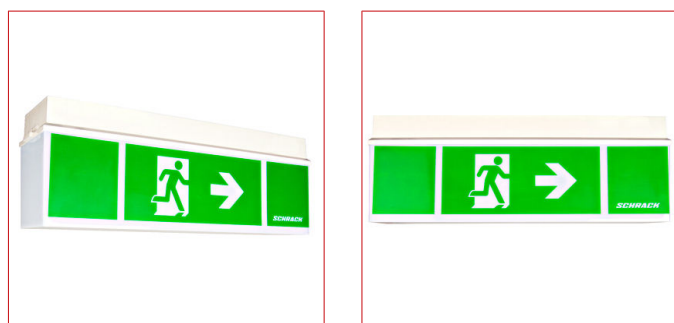

Fișe tehnice


Lungime (mm)	360,00
Lățime netă (mm)	92,00
Înălțime (mm)	125,00
Masă netă (kg.)	0,70
Tip iluminare	Combined rescue path and rescue sign luminaire semn (corp) iluminat siguranță lampă de siguranță
EB-ZB	Central power supply luminaire
Funcție	with monitoring - centrally switchable
Versiune	corp iluminat din plastic
Tip	KW
Fără halogen	Housing made of halogen-free plastic
Culoare	alb
Domeniu recunoaștere (m.)	16
Sursă de lumină	ERT-LED (4W)
Lumen	520
Tensiunea de alimentare (V)	230V AC 50Hz ±20%; 230V DC ±20%
Grad de protecție	IP54

Fișe tehnice - Continuare

Montaj	Montaj de perete Montaj încadrat în plafon universal
Temperatura minimă a mediului ambiant (°C)	-20
Temperatura maximă a mediului ambiant (°C)	40
AA Class E 8101	AA4
Fabricant	Schrack

Dimensions (mm)

NLKWD...

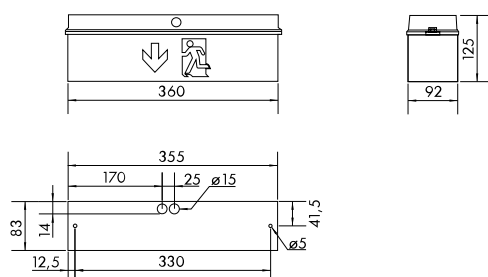

Distance table - min. illumination at the middle line: 1 lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	3,46	9,46	7,98	6,13	2,30
2,50	3,57	9,93	8,36	6,47	2,33
3,00	3,58	10,22	8,57	6,65	2,26
3,50	3,38	10,35	8,62	6,67	2,02
4,00	3,13	10,32	8,51	6,53	1,62

Tabel articole

Descriere	Cod comandă
C.il. Siguranta KW 4x1W ERT-LED 230V, montaj tavan with supervision - centrally switchable, suitable for ceiling mounting with pictograms on one or two sides as well as for wall mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m	NLKWD039EL
Accesorii opționale	
DIFUZOR CLAR pentru KW	NLKCW
Protectia cos pentru KW	NLBKW
Set de pictograme pentru NLKWI... stânga, dreapta, sus, jos	NLKWIPIKTO
DIFUZOR OPAL lumina de urgenta KW, PERETE	NLKWH
pendul pereche, alb, 500mm precablat	NL2PW
Brat perete alb ptr. KB, KX, KW, KCD, KE, GX, RX	NLAWX001