

Date tehnice pentru produs: NLKWD431 SC

Emerg.lum. KW Autotest 4x1 W ERT-LED 3h 230V AC ceiling m.

1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, 1h: 520lm; 3h: 520lm




Fișe tehnice

Lungime (mm)	390,00
Lățime netă (mm)	93,00
Înălțime (mm)	139,00
Masă netă (kg.)	0,70
Tip iluminare	Combined rescue path and rescue sign luminaire semn (corp) iluminat siguranță lampă de siguranță
EB-ZB	Self contained luminaire
Funcție	autocontrol
Versiune	corp iluminat din plastic
Tip	KW
Fără halogen	Housing made of halogen-free plastic

Fișe tehnice - Continuare

Culoare	alb
Domeniu recunoaștere (m.)	16
Timp autonomie (h)	3
Sursă de lumină	ERT-LED (4W)
Lumen	1h: 520;3h: 520
Domeniul de tensiune (V)	230V AC 50Hz ±20%
Baterie (V/Ah)	2x 3,2V/3,3Ah LiFePO4
Grad de protecție	IP54
Montaj	Montaj încadrat în plafon
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	40
AA Class E 8101	AA4
Fabricant	Schrack

Desen dimensional: Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m.

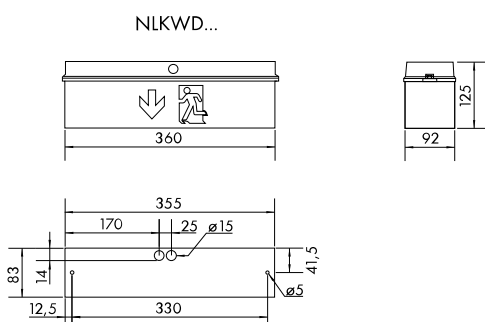

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Tabel articole

Descriere	Cod comandă
Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m. 1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one NLKWD431 SC side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, 1h: 520lm; 3h: 520lm	
Accesorii opționale	
Protectia cos pentru KW	NLBKW
pendul pereche, alb, 500mm precablat	NL2PW
Brat perete alb ptr. KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Accu 3,2V 3,0Ah LiFePO4 ptr.LED C.il KM,KSC,KMB,ASM,ZAW	
LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230