

Date tehnice pentru produs: NLKWD433SC

Emerg.lum. KW Autotest 4x1 W ERT-LED 3h 230V AC ceiling m.

With exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, with LiFePO₄ battery, 1h: 520lm; 3h: 520lm; 8h: 200lm




Fișe tehnice

Lungime (mm)	390,00
Lățime netă (mm)	93,00
Înălțime (mm)	139,00
Masă netă (kg.)	0,80
Tip iluminare	Combined rescue path and rescue sign luminaire semn (corp) iluminat siguranță lampă de siguranță
EB-ZB	Self contained luminaire
Funcție	autocontrol
Versiune	corp iluminat din plastic
Tip	KW

Fișe tehnice - Continuare

Fără halogen	Housing made of halogen-free plastic
Culoare	alb
Domeniu recunoaștere (m.)	16
Timp autonomie (h)	3
Sursă de lumină	ERT-LED (4W)
Lumen	1h: 520;3h: 520;8h: 200
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Baterie (V/Ah)	2x 3,2V/3,3Ah LiFePO4
Grad de protecție	IP54
Montaj	Montaj încadrat în plafon
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	40
AA Class E 8101	AA4
Fabricant	Schrack

Desen dimensional: Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m.

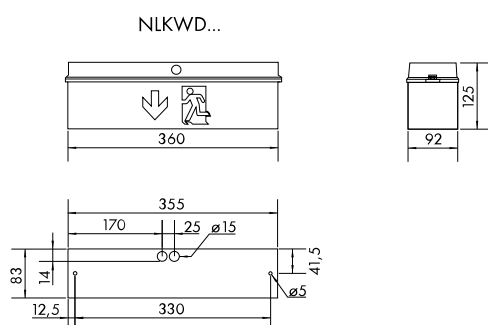

Abstandstabelle 1h, 3h Autonomie - Min. Beleuchtungsstärke: 1lx - Wartungsfaktor 0,80

Montagehöhe [m]					
2,00	3,82	9,88	8,56	7,32	2,88
2,50	3,98	10,50	9,14	7,87	3,01
3,00	4,06	10,95	9,57	8,26	3,06
3,50	4,04	11,26	9,85	8,51	3,02
4,00	3,94	11,44	10,01	8,64	2,90
5,00	3,42	11,42	9,96	8,54	2,34
6,00	1,86	10,92	9,40	7,96	0,56

Tabel articole

Descriere	Cod comandă
Emerg.lum. KW Autotest 4x1W ERT-LED 3h 230V AC ceiling m. With exchangeable lenses, corridor lenses in scope of delivery included, 1h/3h adjustable, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side with additional illumination for escape routes, viewing distance: 16m, IP54, protection class II, with LiFePO4 battery, 1h: 520lm; 3h: 520lm; 8h: 200lm	NLKWD433SC
Accesorii opționale	
Protectia cos pentru KW	NLBKW
pendul pereche, alb, 500mm precablat	NL2PW
Brat perete alb ptr. KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Set 2 Accus LiFePO4 3,2V 3,3Ah f. WirelessControl lum. w.LEO LiFePO4 - baterie litiu-fier fosfat , UN3480 - UN 3480 : baterii litiu-ion	NLAKKU323L