

Date tehnice pentru produs: NLWHXD403W

Emergency luminaire WHX WL LED IP65 3h 230V AC ceiling mount

Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1 W High Power LED, IP65, 3h autonomy time; pictograms with arrows: left, down, right are already mounted, viewing distance: 30m, LiFePO₄ battery, radio switchable, WirelessControl Professional type






Fișe tehnice

Lungime (mm)	300,00
Lățime netă (mm)	300,00
Înălțime (mm)	179,50
Masă netă (kg.)	1,74
Tip iluminare	semn (corp) iluminat siguranță
EB-ZB	Self contained luminaire
Funcție	autocontrol
Versiune	corp iluminat din plastic
Tip	WHX
Fără halogen	Housing made of halogen-free plastic
Culoare	Alb

Fișe tehnice - Continuare

Pictogram	Pictograms with arrows left, bottom, right in accordance with ISO 7010 already affixed at the factory
Domeniu recunoaștere (m.)	30
Timp autonomie (h)	3
Sursă de lumină	HP-LED (4W)
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,70
Power non-maintained mode (W)	0,80
Power max. (W)	7,50
Baterie (V/Ah)	2x 3,2V/3,3Ah LiFePO4
grad de protecție	IP65
Rezistentă la impact	≥ IK03
Montaj	Montaj încadrat în plafon
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	40
AA Clasa E 8101	AA4
Fabricant	Schrack

Dimensions (mm)

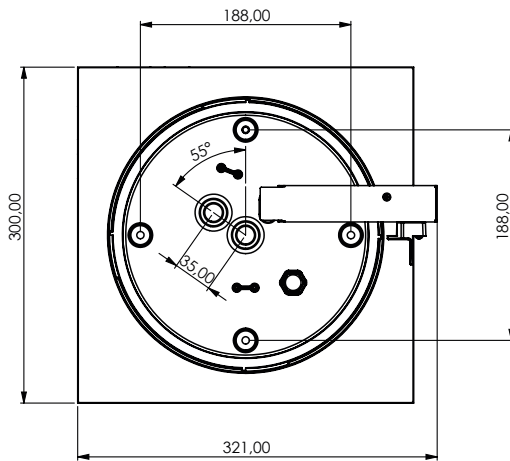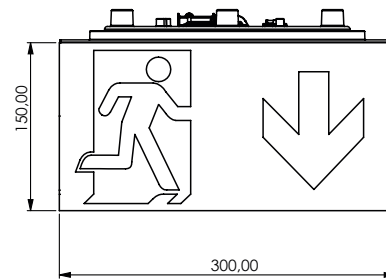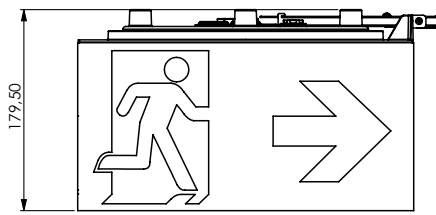

Tabel articol

Descriere	Cod comandă
Emergency luminaire WHX WL LED IP65 3h 230V AC ceiling mount Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1W High Power LED, IP65, 3h autonomy time; pictograms with arrows: left, down, right are already mounted, viewing distance: 30m, LiFePO4 battery, radio switchable, WirelessControl Professional type	NLWHXD403W
Accesorii opționale	
Chain (4 pcs.) eye set ptr.C.il Design WG/WX	NLWKO
Suspensie Design-Y-Cord pt. corpuri de il. cubice WHX, WHG Tool-free length adjustment	NLDSAY4M
Suspensie Design-Y-Cord pt. corpuri de il. cubice WHX, WHG With ceiling adapter for surface mounting, tool-free length adjustment	NLDSAY4MAP
Set 2 Accus LiFePO4 3,2V 3,3Ah f. WirelessControl lum. w.LEO LiFePO4 - baterie litiu-fier fosfat , UN3480 - UN 3480 : baterii litiu-ion	NLAKKU323L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV