

Date tehnice pentru produs: NLZAAC03SC

C.il. Siguranta ZA Autotest LED 3h/ 8h, 230VAC

Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, wall mounting



Fișe tehnice

Lungime (mm)	315,00
Înălțime (mm)	140,00
Adâncime netă (mm)	65,00
Masă netă (kg.)	2,20
Tip iluminare	lampă de siguranță
EB-ZB	Self contained luminaire
Funcție	Autocontrol temperatură joasă
Versiune	lampă de metal
Tip	ZA
Culoare	Antracit
Timp autonomie (h)	3
Sursă de lumină	LED (2W)
Lumen	1h: 170;3h: 170;8h: 76
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Baterie (V/Ah)	3,2/3,0 LiFePO4
grad de protecție	IP65
Montaj	Montaj de perete
Temperatura minimă a mediului ambiant (°C)	-25
Temperatura maximă a mediului ambiant (°C)	40

Fişe tehnice - Continuare

AA Clasa E 8101

AA3

AA4

AA5


Fabricant

Schrack

Dimensions (mm)



Drilling distances (mm)

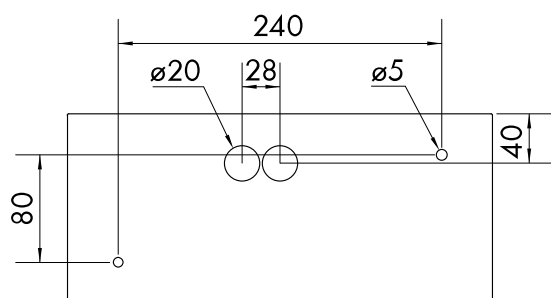

Housing IP54 for COOL-version (mm)



Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tabel articole

Descriere	Cod comandă
C.il. Siguranta ZA Autotest LED 3h/8h, 230VAC Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, wall mounting	NLZAAC03SC
Accesorii opționale	
Accu 3,2V 3,0Ah LiFePO4 ptr.LED C.il KM,KSC,KMB,ASM,ZAW For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230