

Date tehnice pentru produs: NLZAWC03WL

C.il. Siguranta ZA Wireless LED 3h 230VAC

Zinc die-cast, white, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, 170lm, WirelessControl Professional type



Fișe tehnice


Lungime (mm)	315,00
Înălțime (mm)	140,00
Adâncime netă (mm)	65,00
Masă netă (kg.)	2,20
Tip iluminare	lampă de siguranță
EB-ZB	Self contained luminaire
Funcție	Control Wireless temperatură joasă
Versiune	lampă de metal
Tip	ZA
Culoare	Alb
Timp autonomie (h)	3
Sursă de lumină	LED (2W)
Lumen	170
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Baterie (V/Ah)	3,2/3,0 LiFePO4
grad de protecție	IP65
Montaj	Montaj de perete
Temperatura minimă a mediului ambiant (°C)	-25
Temperatura maximă a mediului ambiant (°C)	40
AA Clasa E 8101	AA3 AA4 AA5

Fișe tehnice - Continuare


Fabricant

Schrack

Dimensions (mm)

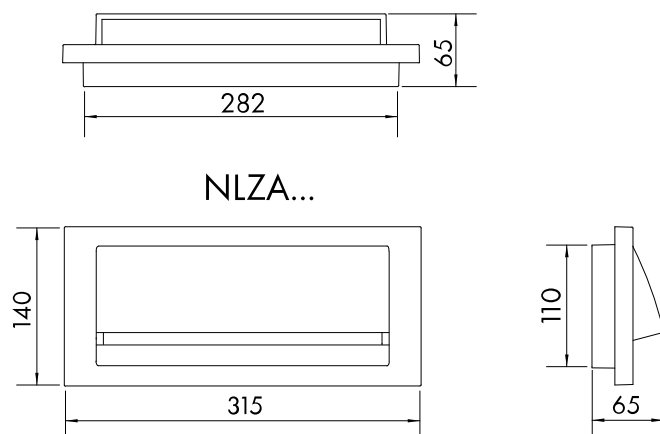

Drilling distances (mm)

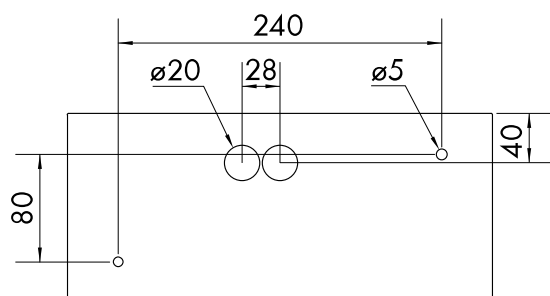

Housing IP54 for COOL-version (mm)



Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tabel articole

Descriere	Cod comandă
C.il. Siguranta ZA Wireless LED 3h 230VAC Zinc die-cast, white, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, 170lm, WirelessControl Professional type	NLZAWC03WL
Accesorii opționale	
Accu 3,2V 3,0Ah LiFePO4 ptr.LED C.il KM,KSC,KMB,ASM,ZAW For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230