

Date tehnice pentru produs: SR1D24282S

SORAX Ventilated Door, W=800xH=2.000mm, RAL9005

Opening angle of the door 180° (aligned), compatible for mounting a TANlock swivelling lever



Detalii produs

- Ventilated door/ventilated (80% air flow)
- swivelling lever
- with rod lock
- Three-point locking
- door opening angle 180°
- optional right-hand or left-hand stop (Door hinge on the right as standard)
- compatible for mounting a TANlock swivelling lever
- incl. fastening device for neat cable routing
- RAL9005


Fișe tehnice

Lățime netă (mm)	800,00
Înălțime (mm)	2.000,00
Adâncime netă (mm)	25,00
COD EAN	9004840999112

Fișe tehnice - Continuare

PREȚ	1.281,00
Culoare	RAL 9005
Tipul produsului	Ventilated steel sheet door

Desen dimensional: SORAX Ventilated Door, W=800xH=2.000mm, RAL9005

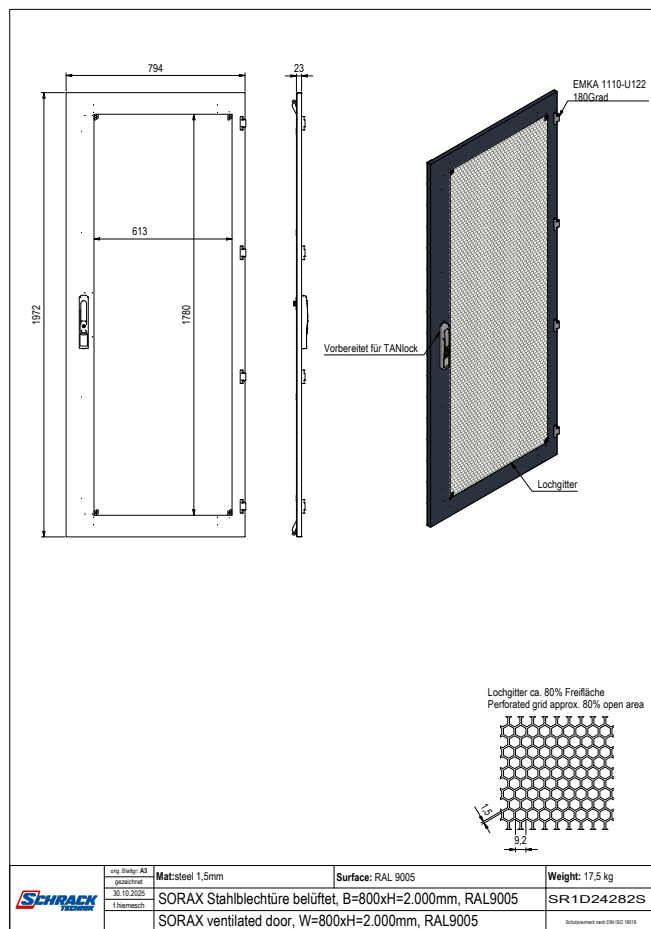

Descriere	Cod comandă
SORAX Ventilated Door, W=800xH=2.000mm, RAL9005	SR1D24282S
Opening angle of the door 180° (aligned), compatible for mounting a TANlock swivelling lever	