

Date tehnice pentru produs: BZH44011--

Releu de timp digital ASTRO, anual, 4 canale, 4 module

Bluetooth integrat, pentru montaj pe șină DIN



Schrack Info

- 1, 2, 3 or 4 channels
- Daily, weekly, annual or astro programme
- 300 memory locations
- Bluetooth integrated
- Directly programmable via app (iOS, Android and Windows)
- DCF/GPS function
- Additional switching times ON, OFF and pulse according to date and time
- Permanent switching according to date and time / holiday programme
- Up to 10 special programmes possible
- Automatic summer time changeover
- Operating hours and switching pulse counter
- Easy to use
- Illuminated display
- Security through PIN coding

Highlights

- Programmable with PC or smartphone via Bluetooth (free iOS, Android and Windows app)
- No additional data key is required
- Bluetooth is integrated in the time switch
- Replaceable battery (CR 2032) with 10-year power reserve

- Random function for presence simulation
- Optimised power consumption: only 0.3W in 'standby' mode
- Quick and intuitive programming
- Programmable without mains connection
- Datensicherheit durch E -PROM


Fișe tehnice

Lățime netă (mm)	71,50
Înălțime (mm)	90,00
Temperatura minimă a mediului ambiant (°C)	-30
Temperatura maximă a mediului ambiant (°C)	55
Tensiune de alimentare AC (V)	110-230
Consum de putere	0,3 - 2,2W
Contacte	4 comutatoare
Material de contact	AgSnO ₂
Capacitate de comutație [rezistiv]	16A / 250V~ bei cosφ=1
Switching capacity [inductive load]	10A at Φcos=0.6
Putere comutată (kW)	1.000mW (10V / 10mA)
Curent la pornire	Max. 50A / max. 20ms
Switching functions	ON, OFF, Pulse, Extra, Permanent, Astro
Shortest switching distance	1 min.
Precizie	Quarz: ≤±0.5 sec./zi
Rezervă de putere	10 ani
Păstrare date	nelimitat
Afișaj	Ecran LC cu înaltă rezoluție (domeniu de vizualizare 12.8cm)
Gama de temperatură - Funcționare (°C)	-30 to +55
Carcasă	Self-extinguishing thermoplastic
Montaj	35mm DIN-Rail
Tip conexiune	Cleme cu șurub
grad de protecție	IP20
Clasă de protecție	II
Grad de poluare	2
Accesorii	BZH04010 (Radio receiver GPS time signal) / not included


Tabel de date: Releu de timp digital ASTRO, anual, 4 canale, 4 module

Glüh-, Halogenlampen	2000W
Leuchtstofflampe unkomp.	1000W
Leuchtstofflampe reihenkomp.	1000W
Leuchtstofflampe parallelkomp.	550W
Energiesparlampe	200W
LED (230VAC)	200W

Circuit diagram * depending on version

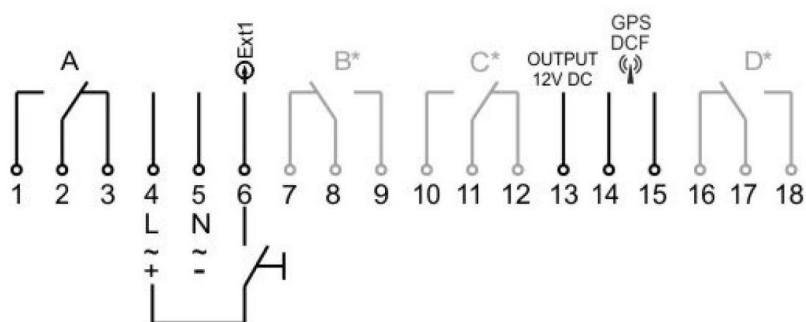

Dimensions

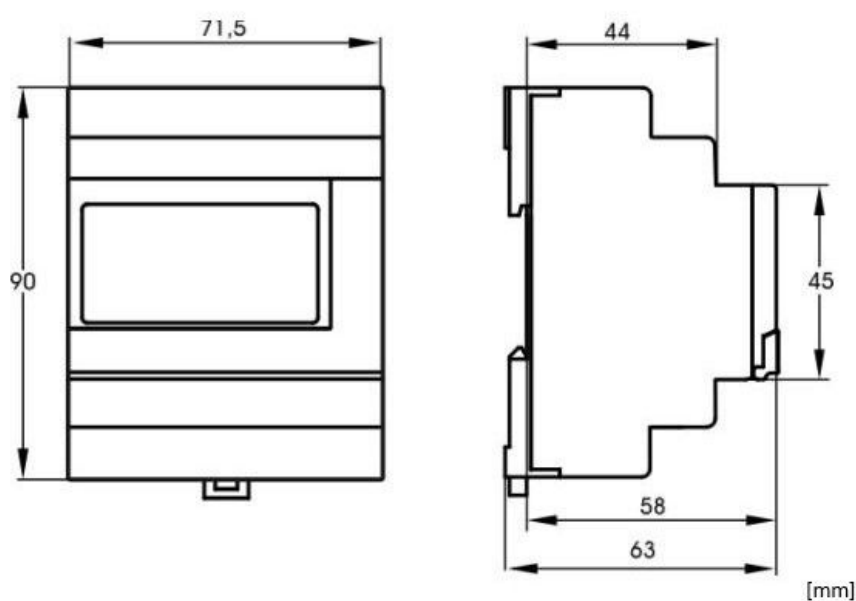

Tabel articole

Descriere	Cod comandă
Relev de timp digital ASTRO, anual, 4 canale, 4 module Bluetooth integrat, pentru montaj pe șină DIN	BZH44011
Accesorii opționale	
Receptor radio semnal de timp GPS Compatible with the BZH44011--	BZH04010