


Date tehnice pentru produs: HLP24LC03F

# Patchcord Duplex LC/UPC - SC/UPC, 50/125µm OM4, 3.0m

LSOH, violet

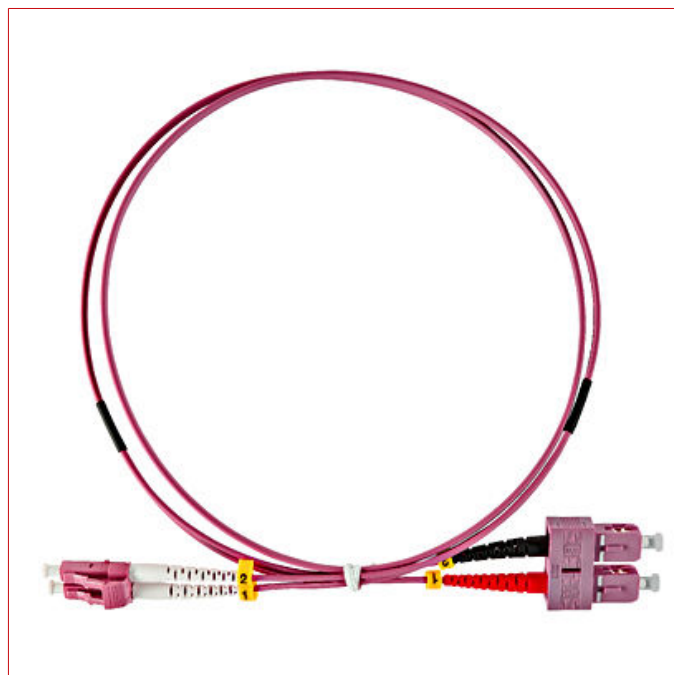

## SCHRACK-Info

Multimode patch cords are mainly used for short-distance communication with high transmission rates, for example within a building or on a campus. The multimode patch cords are equipped with an LSOH-jacket. These comply with IEC or EIA-TIA standards. These multimode enhanced patch cords are terminated with optimized connectors which give optimum optical performance.

### FEATURES

- LC/UPC - SC/UPC connectors
- Low smoke zero halogen (LSOH) jacket
- 900 µm tight buffer
- Multimode cabled fiber conforms to ITU-T G.651.1, IEC 60793-2-10
- Duplex
- REACH, RoHS and SvHC materials compliant

### APPLICATIONS

- CATV / Video
- Passive Optical Network PON
- WDM / DWDM
- FTTH
- Data centers
- Supports high speed multi channel video, data and voice services in metropolitan and access networks


- ATM, SONET and WDM



## Fișe tehnice

|                                            |                               |
|--------------------------------------------|-------------------------------|
| Standard produs                            | IEC 61300-3-4 / IEC 61300-3-6 |
| Conector standard                          | IEC 61754                     |
| Combinajie conectori                       | LC/SC                         |
| Lungime patchcord (m.)                     | 3,0                           |
| Fibră                                      | 50/125μ OM4 multimode         |
| Manta                                      | LSOH                          |
| Culoare                                    | violetă de iarbă              |
| Pierdere de inserție tipică (dB)           | ≤0,25                         |
| Pierderi pe retur tipice (dB)              | ≥30                           |
| Temperatura minimă a mediului ambiant (°C) | -20                           |
| Temperatura maximă a mediului ambiant (°C) | 60                            |
| Lățime netă (mm)                           | 200,00                        |
| Înălțime (mm)                              | 300,00                        |
| Masă netă (kg.)                            | 0,05                          |

## Desen dimensional: Patchcord Duplex LC/UPC - SC/UPC, 50/125μm OM4, 3.0m

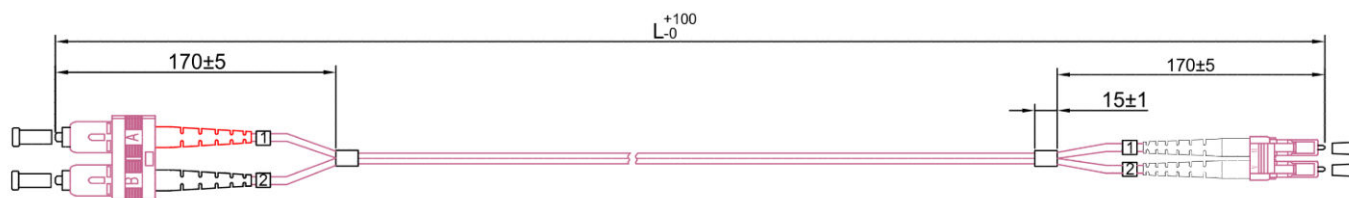

| Descriere                                                            | Cod comandă |
|----------------------------------------------------------------------|-------------|
| Patchcord Duplex LC/UPC - SC/UPC, 50/125μm OM4, 3.0m<br>LSOH, violet | HLP24LC03F  |