

Date tehnice pentru produs: NLEERF029E

C.il. Siguranta EE 1x1W ERT-LED 230V AC/DC cai evacuare


White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate rescue hallways with a luminaire distance of 18m at a mounting high of 3,5m, with supervision - centrally switchable



Fișe tehnice

Înălțime (mm)	23,00
Diametru (mm)	88,00
Masă netă (kg.)	0,30
Tip iluminare	lampă de siguranță
EB-ZB	Central power supply luminaire
Funcție	with monitoring - centrally switchable
Versiune	lampă de metal
Tip	EE
Culoare	alb
Sursă de lumină	ERT-LED (1W)
Lumen	140
Tensiunea de alimentare (V)	230V AC 50Hz ±20%; 230V DC ±20%
grad de protecție	IP20
Montaj	Montaj încastat în plafon
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	40
AA Class E 8101	AA4

Dimensions (mm)

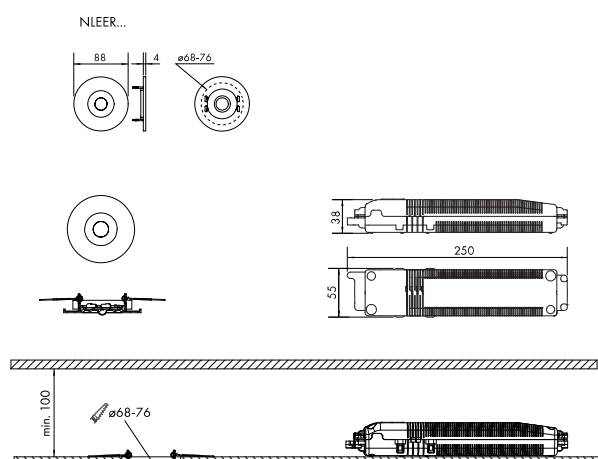

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	6,16	15,89	12,84	4,92	1,80
2,50	6,19	17,44	13,32	5,08	1,75
3,00	5,41	18,17	12,00	5,13	1,60
3,50	4,48	18,19	10,53	5,05	1,34
4,00	3,13	16,75	8,72	4,81	1,00

Tabel articole

Descriere	Cod comandă
C.il. Siguranta EE 1x1W ERT-LED 230V AC/DC cai evacuare White, with round cover, ceiling recessed mounting with metal springs and external electronic box, security luminaire to illuminate rescue hallways with a luminaire distance of 18m at a mounting high of 3,5m, with supervision - centrally switchable	NLEERF029E
Accesorii opționale	
Capac ptr.C.il. Sig. Design EE alb, patrat Incl. 2 metal springs	NLEEQWS
Capac ptr.C.il. Sig. Design EE antracit, patrat Incl. 2 metal springs	NLEEQAZ
Capac ptr.C.il. Design EE antracit, rotund Incl. 2 metal springs	NLEERAZ