

Date tehnice pentru produs: NLKWID438W

Emergency luminaire KWI Wireless 4x1W ERTLED 8h 230V ceiling

With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO₄, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 245lm, WirelessControl Professional type




Fișe tehnice

Lungime (mm)	390,00
Lățime netă (mm)	93,00
Înălțime (mm)	139,00
Masă netă (kg.)	1,30
Tip iluminare	semn (corp) iluminat siguranță lampă de siguranță
EB-ZB	Self contained luminaire
Funcție	control wire-less
Versiune	corp iluminat din plastic
Tip	KWI
Fără halogen	Housing made of halogen-free plastic

Fișe tehnice - Continuare

Culoare	Alb
Pictogram	Adhesive pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Domeniu recunoaștere (m.)	16
Timp autonomie (h)	8
Sursă de lumină	ERT-LED (4W)
Lumen	245
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Baterie (V/Ah)	2x 3,2V/3,3Ah LiFePO4
grad de protecție	IP65
Rezistență la impact	IK06
Montaj	Montaj încadrat în plafon
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	40
AA Clasa E 8101	AA4
Fabricant	Schrack

Dimensions (mm)

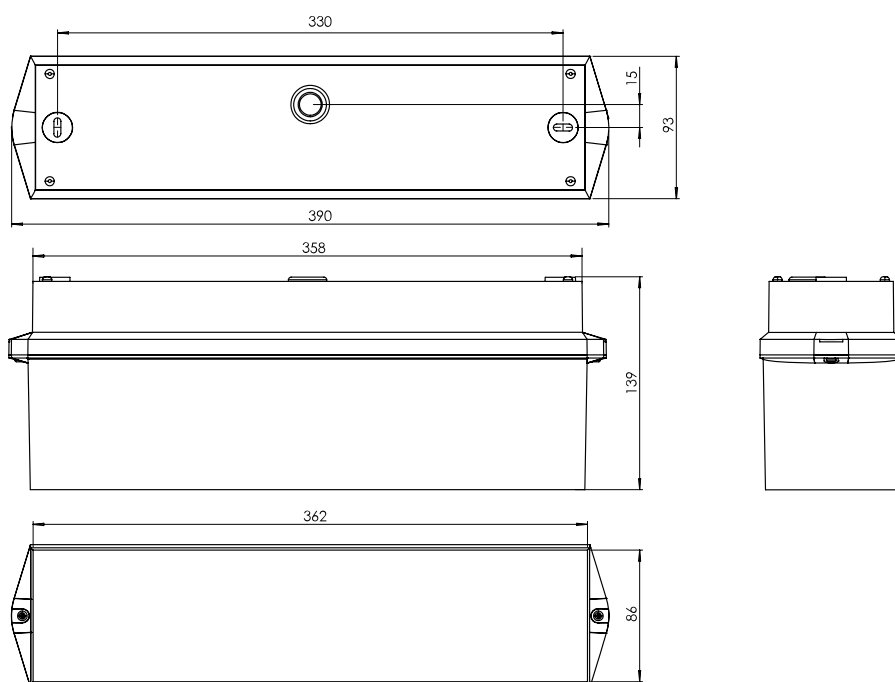

Tabel articole

Descriere	Cod comandă
Emergency luminaire KWI Wireless 4x1W ERTLED 8h 230V ceiling With exchangeable lenses, corridor lenses in scope of delivery included, LiFePO4, ceiling surface mounting with pictograms on one or two sides or for wall surface mounting with pictogram on one side, viewing distance: 16m, IP65, IK06, protection class II, radio switchable, 245lm, WirelessControl Professional type	NLKWID438W
Accesorii opționale	
Protectia cos pentru KW	NLBKW
Set de pictograme pentru NLKWI... stânga, dreapta, sus, jos	NLKWIPKTO
pendul pereche, alb, 500mm precablat	NL2PW
Brat perete alb ptr. KB, KX, KW, KCD, KE, GX, RX	NLAWX001
Set 2 Accus LiFePO4 3,2V 3,3Ah f. WirelessControl lum. w.LEO LiFePO4 - baterie litiu-fier fosfat , UN3480 - UN 3480 : baterii litiu-ion	NLAKKU323L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV