

Date tehnice pentru produs: NLWERW29EL

C.il. Siguranta WER ERT-LED 1x1W 230V AC/DC EL

Wall recessed mounting, Zinc die-cast, colour: white, with supervision - centrally switchable, recessed mounting with adapter frame in switch box Ø68mm, 140lm



Fișe tehnice

Lungime (mm)	90,00
Înălțime (mm)	90,00
Adâncime netă (mm)	21,00
Masă netă (kg.)	0,18
Tip iluminare	lampă de siguranță
EB-ZB	Central power supply luminaire
Funcție	Cu monitorizare - comutație centralizată
Versiune	lampă de metal
Tip	WER
Culoare	RAL 9003 (alb)
Sursă de lumină	ERT-LED (1W)
Lumen	140
Tensiunea de alimentare (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,70
Power max. (W)	2,10
grad de protecție	IP20
Rezistență la impact	≥ IK03
Montaj	Montaj perete
Temperatura minimă a mediului ambiant (°C)	-20
Temperatura maximă a mediului ambiant (°C)	40

Fișe tehnice - Continuare


AA Clasa E 8101

AA4


Fabricant

Schrack


Dimensions (mm)

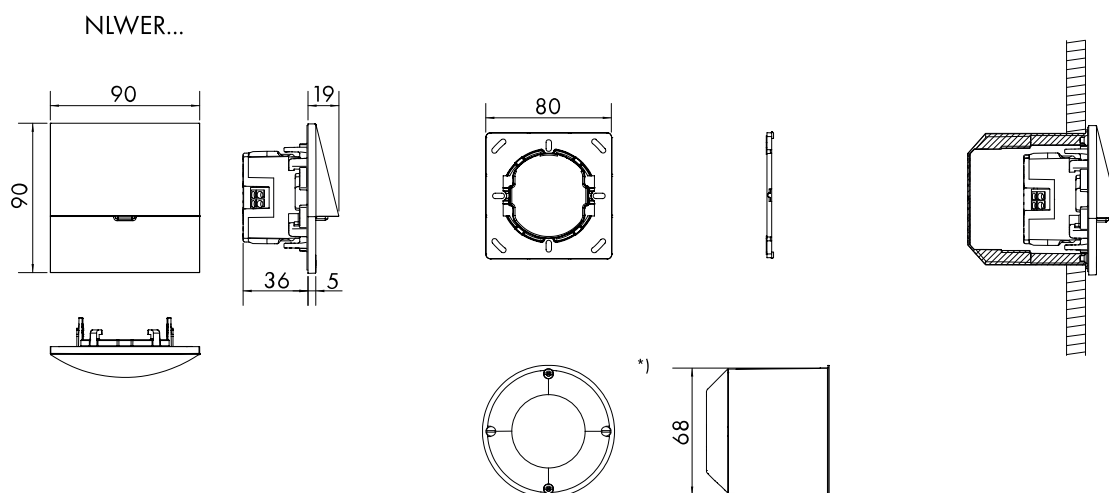

Floor plan illumination for wall mounting with mounting height 2,0m, maintenance factor 0,8

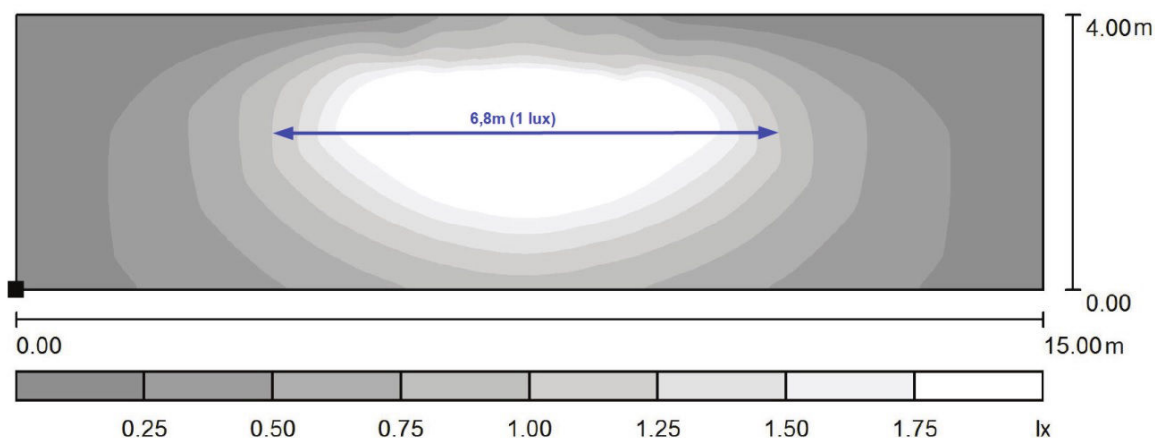

Floor plan illumination for wall mounting with mounting height 0,5m, maintenance factor 0,8

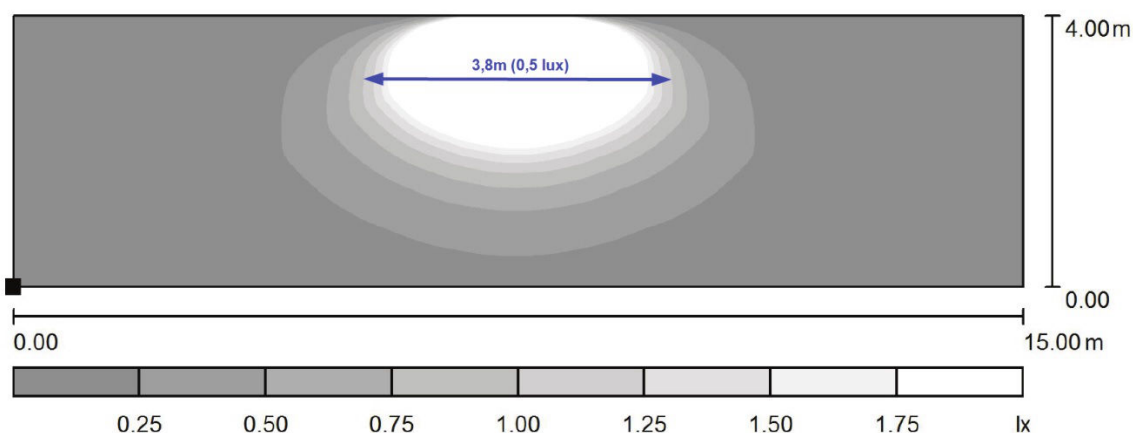

Descriere	Cod comandă
C.il. Siguranta WER ERT-LED 1x1W 230V AC/DC EL Wall recessed mounting, Zinc die-cast, colour: white, with supervision - centrally switchable, recessed mounting with adapter frame NLWERW29EL in switch box Ø68mm, 140lm	