

Date tehnice pentru produs: NLZAA003WL

C.il. Siguranta ZA Wireless LED 3h 230VAC

Zinc die-cast, anthracite, IP65, -5° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries inside the luminaire, central switching, wall mounting, WirelessControl Professional type




Fișe tehnice

Lungime (mm)	315,00
Înălțime (mm)	140,00
Adâncime netă (mm)	65,00
Masă netă (kg.)	2,20
Tip iluminare	lampă de siguranță
EB-ZB	Self contained luminaire
Funcție	control wire-less
Versiune	lampă de metal
Tip	ZA
Culoare	Antracit
Timp autonomie (h)	3
Sursă de lumină	LED (2W)
Lumen	170
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterie (V/Ah)	3,2/3,0 LiFePO4
grad de protecție	IP65
Rezistență la impact	IK08
Montaj	Montaj de perete
Temperatura minimă a mediului ambiant (°C)	-5


Fișe tehnice - Continuare

Temperatura maximă a mediului ambiant (°C)	40
AA Clasa E 8101	AA4
Fabricant	Schrack

Dimensions (mm)

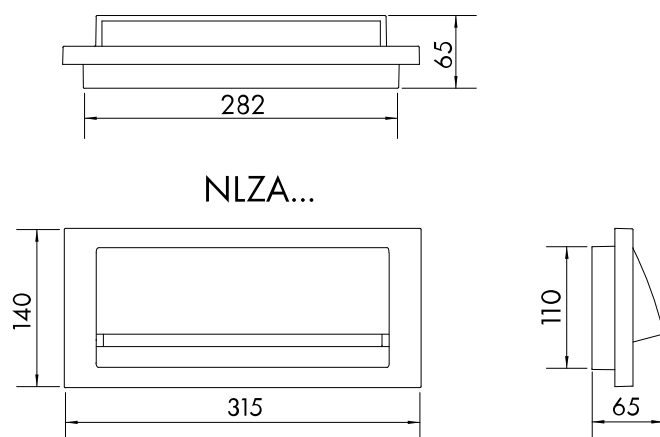

Drilling distances (mm)

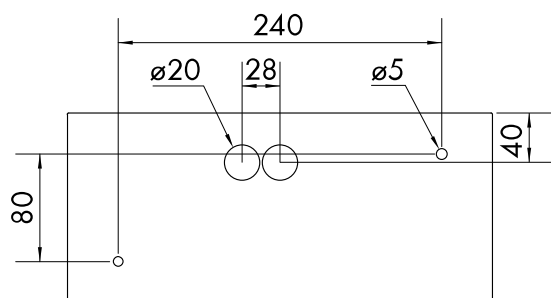

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8, 3h Autonomiezeit

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tabel articole

Descriere	Cod comandă
C.il. Siguranta ZA Wireless LED 3h 230VAC Zinc die-cast, anthracite, IP65, -5° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries inside the luminaire, central switching, wall mounting, WirelessControl Professional type	NLZAA003WL
Accesorii opționale	
Accu 3,2V 3,0Ah LiFePO4 ptr.LED C.il KM,KSC,KMB,ASM,ZAW For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230